

celduc<sup>®</sup> relais



[www.celduc.com](http://www.celduc.com)


# Selection guide catalogue



solid state relays



magnetic sensors

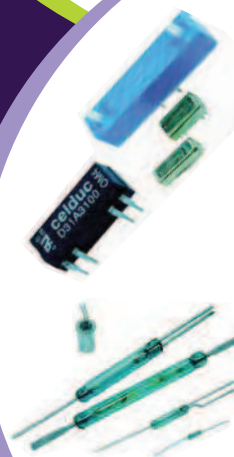

reed relays and switches

PROUD TO SERVE YOU

# Dear customers,

*New means of communication make paper-catalogues less useful but this short-form catalogue is an eagerly anticipated product selection guide.*

*Our strategy has always been to focus on research and innovation whilst remaining flexible enough to adapt products to our customers' applications and requirements. As a result we can offer products engineered to the highest quality for competitive prices. These core values have inspired us to develop several new products which can be found in this selection guide.*

*This selection guide catalogue is available in 6 languages, Chinese included. This demonstrates our worldwide presence and export dynamism: celduc® relais exports more than 60% of its production across the the main industrial countries, under our brand or through OEM contracts.*


*celduc® relais is a leader in its three strategic business units which are Solid State Relays (S), Magnetic proximity sensors (P) and reed relays & switches (R). Discover our new celpac®2G (2nd generation of 22,5mm pitch SSR and contactors), okpac® and flatpac® range with which we have had great success worldwide across many different applications.*

*Our main focus is achieving the best possible service and most reliable products possible and we invest a lot of time in this process. celduc® team would be pleased to answer any questions you may have to help you find the ideal product for your requirements. Ask us and we will produce it for you.*

Marc Combette  
General Manager

**All our technical data-sheets are available in our website.**

[www.celduc-relais.com](http://www.celduc-relais.com)

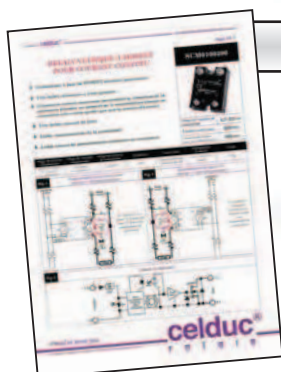

## celduc® relais products


pages 1 to 22

### Solid state relays

(Commonly known as SSR) represent 60% of the turnover of celduc® relais.

These innovative and highly efficient components are used to control all types of loads used in many industries.

The three major application areas are industrial heating and temperature control, motor control and/or public lighting control. Every day new applications calling for reliability, no noise and long life expectancies make use of our highly innovative solid state relays that provide the small but vital «extra» when compared to our competitor's products.

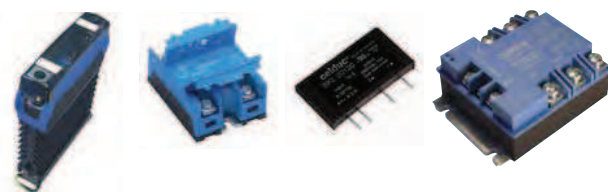

pages 23 to 35

### Magnetic proximity sensors


Used for monitoring or controlling levels, clearances, movement, position and as a tachometer to record speed of rotation, the sky is the limit for these versatile sensors. These sensors are used by both the general public and the major industrial organizations such as the automotive, aircraft and telecommunication industries. They are also used extensively in all automation applications of the manufacturing sector.



pages 36 to 37

### «Reed» relays & switches

Our Reed switches are used in combination with magnetic proximity sensors & reed relays and have proved to be an out-and-out winner over the past 50 years. The range meets the demands of an increasing number of new applications thanks to their ease of operation, compact size and reliability.

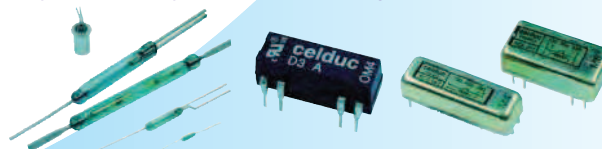



# Solid State Relays

## SCOPE

### Heating

Plastic injection molding  
Furnaces  
Power supply distribution systems  
Air conditioning  
Textile  
Home heating  
Infrared heating  
Drying  
Thermoforming  
Etc.

### Motor starting

Pumps  
Compressors  
Plastic injection molding  
Conveyors  
Fans  
Etc.

### Lighting

Public lighting  
Cinema  
Theatre lamps  
Airport runway lamps  
Road lighting  
Etc.

### Control

PLC interface  
Heating element control  
Solenoid valves  
Contactor Coils  
Optocoupling of sensors

### Miscellaneous

Transformer starting  
Power factor corrector  
Uninterrupted power supplies  
Energy source switching  
Capacitors control

## STANDARDS

The solid-state relays and contactors made by celduc® are manufactured in compliance with major international standards :

- IEC 947-4-2 for motor control.
  - IEC 947-4-3 for the other loads.
  - American et Canadian (UL, CSA, cUL).
  - IEC / EN 60950 - IEC 62314 - VDE0805
- Our products also meet the major European directive regarding the CE marking.
- Some of our products fulfil the requirements according to DIN EN60601-1 (VDE 0750) for medical applications and also the requirements for explosive atmospheres ATEX "EX".
  - All of our relays okpac® SO (as well as SC relays), celpac® 2G SU/SA including the current sense module ESUC but also the 2-phase SOB and 3-phase SGT comply with the European standard EN61373 for railways : Shocks and vibration tests on relays. Regarding the standards about Fire behaviour and fumes : French standard NF F16-102 calling for the EN60 695-2-10/11/12 (Glow Wire tests), blue covers of SO relays and SU/SA relays are classified I2 or I3 for fire behaviour and F2 for fumes (toxicity and opacity). Encapsulating resin and black housings are being completed.
  - The process of manufacturing of our relays complies with the ISO9001 requirements version 2008. We incorporate highly reliable components with a very high electromagnetic interference level.

# Contents

<b>PCB relays</b>	<b>2 to 4</b>
-SLA SLD .....	2
-SP/ST .....	2
-SK .....	3
-XK .....	4
-SN8 .....	4
-SHT .....	4
<b>Single phase Solid State Relays</b>	<b>5 to 11</b>
-SO7 / SO8 .....	5
-SO9 .....	6
-SOL .....	6
-SOR .....	6
-SA / SU .....	7
-SAL / SAM / SUL / SUM .....	8
-ESUC .....	8
-SILD / SOD .....	9
-SVX .....	10
-SF / SCF / SCFL .....	10
-SP7 / SP8 .....	10
-SC .....	11
<b>Two phase Solid State Relays</b>	<b>12</b>
-SOB .....	12
-SCB .....	12
<b>Three phase Solid State Relays</b>	<b>13 to 14</b>
-SCT .....	13
-SGT .....	13
-SVT .....	13
-SWT / SIT .....	14
<b>SSR for motor control</b>	<b>14 to 15</b>
-SG9 .....	14
-SV9 .....	14
-SW9 .....	14
-XKRD .....	15
-SGRD .....	15
-SMCV / SMCW .....	15
<b>Single phase controllers</b>	<b>16 to 17</b>
-SIL4 / SIM4 .....	16
-SO4 .....	16
-SG4 .....	16
-SO3 .....	17
-SG5 .....	17
-SWG5 .....	17
-SWG8 .....	17
<b>Three phase controllers</b>	<b>18</b>
-SVTA / SWTA .....	18
-SGTA .....	18
<b>Four-Leg Solid State Relays</b>	<b>18</b>
-SCQ .....	18
<b>DC Solid State Relays</b>	<b>19 to 20</b>
-SPD / STD .....	19
-SKLD .....	19
-SCM .....	19
-SOM .....	19
-ESO .....	19
-SKD .....	20
-XKD .....	20
-SCC / SGC .....	20
-SCI .....	20
<b>Special relays</b>	<b>21</b>
<b>Heatsinks</b>	<b>22</b>
<b>Accessories</b>	<b>22</b>

# PCB relays

## SLIM range (miniature)

100% compatible with electromechanical relays



	Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm
A C	SLA01220	2A	12-280VAC	3-10VDC	320 $\Omega$	RC	AC output	28x5x15
	SLA02220	2A	12-280VAC	7-20VDC	1100 $\Omega$			
	SLA03220	2A	12-280VAC	18-32VDC	3 k $\Omega$			
D C	SLD01205	4A	0-32VDC	3-10VDC	320 $\Omega$	Transil	DC output	28x5x15
	SLD01210	2,5A	0-60VDC	3-10VDC	320 $\Omega$			
	SLD02205	4A	0-32VDC	7-20VDC	1070 $\Omega$			
	SLD03205	4A	0-32VDC	18-32VDC	3 k $\Omega$			
	SLD03210	2,5A	0-60VDC	18-32VDC	3 k $\Omega$			
	SLD04210	2,5A	0-60VDC	38-58VDC	10,8 k $\Omega$			

Other miniature solid state relay options are available on request.



1

Product reference	Specifications	Fig n°
ESD01000	SP/ST base for PCB for one relay	1
ESD08100	8 SLIM module base	2



2

## SP-ST range (standard)

AC and DC from 1 to 5A, protection by VDR or built in Transil, available in 15,7 mm (ST Series) and 25,4 mm (SP Series).

100% compatible with electromechanical relays



1

	Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm	Fig n°
A C	SPA07420	4A	12-275VAC	12-30VDC 15-30VAC	2100 $\Omega$	VDR	AC output	29x12,7x25,4	1
	STA07220	2A	12-275VAC	12-30VDC 15-30VAC	2100 $\Omega$	VDR	AC output	29x12,7x15,7	2
D C	SPD03505	5A	0-30VDC	12-30VDC	2100 $\Omega$	Transil	DC output	29x12,7x25,4	1
	STD03205	2,5A	0-30VDC	12-30VDC	2100 $\Omega$	Transil	DC output	29x12,7x15,7	2
AC DC	STN07105	1A	0-30VAC/ DC	12-30VDC 15-30VAC	2100 $\Omega$	Transil	AC/DC output	29x12,7x15,7	2




2

Product reference	Specifications	Fig n°
ESD05000	SP/ST base for DIN rail for one relay	3
ESD08000	8 SP in line module base	4
ESD16000	16 SP in line module base	4



3

Our STD and SPD modules can be modified, on request, with an output voltage of 100VDC.  
Other control voltages are available on request.



4

## SK range

The SK range for PCB mounting is available in different models :

SKA/SKB (AC output) or SKD/SKLD (DC output – see pages 19-20)

→ SKA up to 6A 230 or 400VAC with built-in voltage protection, ideal for solenoid or motor control.

→ SKB up to 4A 230 or 400VAC for resistive loads.



Product reference	Current	Switching voltage	Control voltage	Input R	LED	I <sup>2</sup> t	Protec.	Specifications	Dimensions mm
SK541101	2,5A	24-280VAC	3-30VDC	1 kΩ	no	50A²s	–	AC zero-cross output / Normally closed	43,2x10,2x25,4
SKA10420	4A	12-275VAC	2,5-10VDC	330 Ω	no	50A²s	VDR	AC zero-cross output / most types of loads	
SKA20420	4A	12-275VAC	4-30VDC	1 kΩ	no	50A²s	VDR		
SKA10440	4A	12-460VAC	2,5-10VDC	330 Ω	no	50A²s	VDR		
SKA11440	4A	12-460VAC	3-10VDC	220 Ω	yes	50A²s	VDR		
SKA20440	4A	12-460VAC	4-30VDC	1 kΩ	no	50A²s	VDR		
SKA21440	4A	12-460VAC	7-30VDC	750 Ω	yes	50A²s	VDR		
SKA20460	4A	24-600VAC	5-30VDC	1 kΩ	no	72A²s	–		
SKA20421	4A	12-275VAC	4-30VDC	1 kΩ	no	50A²s	VDR		
SKA20441	4A	12-460VAC	4-30VDC	1 kΩ	no	50A²s	VDR		
SKA21441	4A	12-460VAC	7-30VDC	750 Ω	yes	50A²s	VDR		
SKB10420	4A	12-280VAC	3-10VDC	330 Ω	no	50A²s	–	AC zero-cross output / resistive loads	
SKB10440	4A	24-600VAC	3,7-10VDC	270 Ω	no	72A²s	–		
SKB20420	4A	12-280VAC	8-30VDC	1200 Ω	no	50A²s	–		
SKB20440	4A	24-600VAC	9-30VDC	1200 Ω	no	72A²s	–		


SKL for AC output with a ceramic substrate that can be mounted on a heatsink. The SKL is available with current ratings from 16A to 75A.

For the power element, our SKL use TMS<sup>2</sup> technology (see the power relay section introduction) reducing thermal stress and considerably improving life expectancy. Ideal for motor or lamps control (I<sup>2</sup>t up to 5000 A<sup>2</sup>s) with high inrush current as well as heating applications. Easy to protect against short circuit with micro circuit breakers.



Product reference	Max. current with WF032000	Thyristor rating	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm
SKL10120	16A	16A	12-280VAC	4-14VDC	440 Ω	128A²s	AC zero-cross output	43,4 x 6,3 x 24,5
SKL10220	21A	25A	12-280VAC	4-14VDC	440 Ω	312A²s		
SKL10240	22A	25A	24-600VAC	4-14VDC	440 Ω	450A²s		
SKL10540	27A	50A	24-600VAC	4-14VDC	440 Ω	1800A²s		
SKL10560	27A	50A	24-690VAC	4-14VDC	440 Ω	1800A²s		
SKL20120	16A	16A	12-280VAC	8-32VDC	1640 Ω	128A²s		
SKL20220	21A	25A	12-280VAC	8-32VDC	1640 Ω	312A²s	AC random output	
SKL20240	22A	25A	24-600VAC	8-32VDC	1640 Ω	450A²s		
SKL20520	27A	50A	12-280VAC	8-32VDC	1640 Ω	1800A²s		
SKL20540	27A	50A	24-600VAC	8-32VDC	1640 Ω	1800A²s		
SKL20740	30A	75A	24-600VAC	8-32VDC	1640 Ω	5000A²s		
SKL10421	27A	40A	12-280VAC	3-14VDC	660 Ω	1150A²s		
SKL10521	27A	50A	12-280VAC	3-14VDC	660 Ω	2450A²s		
SKL20241	22A	25A	24-600VAC	8-32VDC	1640 Ω	450A²s		

See DC output models – pages 19-20.



**WF032000**  
**WF042000**

### Accessories for SKL

Heatsinks for SKL L=150mm 2,6-3 K/W  
Heatsinks for SKL L=100mm 3,6-3 K/W

**1L941000**  
**1L942000**

### Accessories for SKL

Clip for SKL on WF03/04  
Clip for SKL with screw for other heatsinks

The SKH range is a “ready to use” range with integrated heatsink.



Product reference	Output current	Output current with ventilation	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
<b>SKH10120</b>	10A @ 20°C	16A	12-280VAC	4-14VDC	440 Ω	128A <sup>2</sup> s	43,6 x 22 x 35,7
<b>SKH10240</b>	10A @ 25°C	25A	24-600VAC	4-14VDC	440 Ω	450A <sup>2</sup> s	
<b>SKH20120</b>	10A @ 20°C	16A	12-280VAC	8-32VDC	1640 Ω	128A <sup>2</sup> s	
<b>SKH20240</b>	10A @ 25°C	25A	24-600VAC	8-32VDC	1640 Ω	450A <sup>2</sup> s	

Other references available – please contact us.



## XK range

Interface relays to control loads such as resistors, indicators, solenoids, transformers, motors, power contactor coils. These DIN-rail mounted products are available with AC and DC output options. They can also be supplied as dedicated motor control variants such as 2 and 3 phase switching and motor rotation reversal. All are fitted with LED indicators.

Suffix D : removable terminals.

Suffix R : removable spring terminals.



1

A  
C

2

D  
C

Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Spécifications	Dimensions mm	Fig n°
<b>XKA20420</b>	4A	12-275VAC	6-30VDC	1 kΩ	VDR	1 pole AC zero-cross output	12,2x76,4x53	1
<b>XKA20420D</b>	4A	12-275VAC	6-30VDC	1 kΩ	VDR			1
<b>XKA20420R</b>	4A	12-275VAC	6-30VDC	1 kΩ	VDR			1
<b>XKA70420</b>	4A	12-275VAC	15-30VAC/DC	1800 Ω	VDR			1
<b>XKA70440</b>	4A	12-440VAC	15-30VAC/DC	1800 Ω	VDR			1
<b>XKA90440</b>	4A	12-440VAC	150-240VAC/DC	41 kΩ	VDR			1
<b>XKH20120</b>	10A	12-280VAC	10-32VDC	1640 Ω		1 pole AC random output	25x76,4x65	2
<b>XKA20421</b>	4A	12-275VAC	5-30VDC	1 kΩ	VDR		12,2x76,4x53	1
<b>XKD10306</b>	3A	2-60VDC	5-30VDC	1 kΩ	diode	1 pole DC output	12,2x76,4x53	1
<b>XKD11306D</b>	3A	2-60VDC	3-30VDC	600 Ω	diode			1
<b>XKD70306</b>	3A	2-60VDC	10-30VAC/DC	1800 Ω	diode			1
<b>XKD90306</b>	3A	2-60VDC	90-240VAC	41 kΩ	diode			1

XKLD0020 has all protections included and is designed for inductive loads with high switching frequency

- Diagnostic status output (potential free)
- Control visualization by green LED
- Output DC visualization by red LED
- Built-in clamping voltage
- Built-in free wheel diode
- This product also includes a fuse on board to protect the installation.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm
<b>DC XKLD0020</b>	4A	1-32VDC	18-32VDC	1 kΩ	VDR+diode	1 pole DC output	36x78x61

XKLD31006 is a DC SSR suitable for inductive loads and high current applications such as high switching frequency electro-valves.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm
<b>DC XKLD31006</b>	10A	12-36VDC	10-30VDC	1 kΩ	diode	DC output - MOSFET technology	12,2x76,4x53




3

MOTOR  
CONTROL

Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm	Fig n°
<b>XKM22440</b>	4AC-51/2,5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	2 poles motor switching control	25,2x76,4x53	3
<b>XKM23440</b>	4AC-51/2,5AC-53	24-460VAC	12-35VDC	1 kΩ	VDR	3 poles motor switching control	47,5x76,4x53	4
<b>XKR24440</b>	4AC-51/2,5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	AC motor change-over control	58,2x76,4x53	4
<b>XKRD30506</b>	5A-DC	12-24VDC	7-30VDC	1 kΩ	diode	DC motor change-over control		4

The ready to use module XKRD30506 for Din-Rail mounting comprises 4 Solid State relays wired as a reverser to be used to change the direction of a DC motor (100W @ 24Vdc).



4

XKM23 : 3 relays  
XKR24 & XKRD : 4 relays

## SN8 range

This relay is designed for PCB applications and when fitted with suitable heatsink, can control heavy loads in an ultra-miniature, physically compact package.



Product reference	Current	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
<b>SN842500</b>	25A	24-280VAC	15-32VDC	2200 Ω	260A²s	35,05x12,70x28,32

Other references available : please contact us.

## SHT range

Three phase solid state relay in a single low profile package.


This relay is designed for PCB applications in order to provide control of medium power in three phase environments.



Product reference	Current	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
<b>SHT842300</b>	3x25A	24-280VAC	10-30VDC	950 Ω	260A²s	81,28x8,26x27,69

Other references available : please contact us.

## Power Relays



All our solid state relays fitted with back to back thyristors (power products : single phase, two phase, three phase) now use TMS<sup>2</sup> technology with a very high life expectancy compared to the majority of products on the market (application note on request).

# okpac®

**Innovation, Performance and Design !**

### Innovations :

- Screw connection up to 50mm<sup>2</sup>
- Removable control terminals
- Removable IP20
- Versatile, easy and quick connections
- Same screwdriver for outputs and inputs
- Tightening on metal baseplate not on plastic
- SSR, mains and load status
- Less potting resin : environmentally friendly
- 25 to 30% lighter than the SC range.

### Performances :

- Designed for all types of loads Current from 12 to 125A
- TMS<sup>2</sup> technology 4th generation with very long life time expectancy
- Output voltage from 24 to 690 VAC (600V-1200V-1600V peak)
- Very low zero-crossing level
- Large and regulated AC and DC input voltage
- Control status LED
- Very high immunity according IEC/EN61000-4-4 (bursts) and IEC/EN61000-4-5 (spikes) : 4KV with no change of state
- EMC compatible for industrial environment
- UL/cUL, VDE (EN60950), IEC/EN60947-4-3, CE marking
- I<sub>tsm</sub> up to 2000A and I<sup>2</sup>t > 20 000A<sup>2</sup>s
- Protection against circuit breaker.

## S07 range

Typical applications : Motors (AC-53), inductive loads and phase angle control applications.

- Random or instant switching
- Voltage protection on input (transil) and output (RC and VDR)



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
SO745090	50A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	2500A <sup>2</sup> s	45x58,5x30
SO747090	75A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	7200A <sup>2</sup> s	
SO763090	35A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	1250A <sup>2</sup> s	
SO765090	50A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	2500A <sup>2</sup> s	
SO767090	75A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	7200A <sup>2</sup> s	
SO768090	95A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	14400A <sup>2</sup> s	
SO769090	125A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	24000A <sup>2</sup> s	
SO789060	125A	24-690VAC	1600V	3,5-32VDC	I <sub>c</sub> < 13mA	24000A <sup>2</sup> s	

These products should be mounted on heatsinks in order to reach nominal current.

## S08 range

Designed for most types of loads

- Zero cross with low zero-crossing level (<12V)
- Voltage protection on input (transil) with very high immunity according to IEC/EN61000-4-4
- IP20 protection
- Control current < 13mA for all the voltage range at any operating temperature
- Control status LED



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
SO842074	25A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	600A <sup>2</sup> s	45x58,5x30
SO842974	25A	12-275VAC	600V	20-265VAC/DC	I <sub>c</sub> < 10mA	600A <sup>2</sup> s	
SO843070	35A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	1250A <sup>2</sup> s	
SO843970	35A	12-275VAC	600V	20-265VAC/DC	I <sub>c</sub> < 10mA	1250A <sup>2</sup> s	
SO845070	50A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	2500A <sup>2</sup> s	
SO847070	75A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	7200A <sup>2</sup> s	
SO848070	95A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	14400A <sup>2</sup> s	
SO849070	125A	12-275VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	24000A <sup>2</sup> s	
SO863070	35A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	1250A <sup>2</sup> s	
SO863970	35A	24-510VAC	1200V	20-265VAC/DC	I <sub>c</sub> < 10mA	1250A <sup>2</sup> s	
SO865070	50A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	2500A <sup>2</sup> s	
SO865970	50A	24-510VAC	1200V	20-265VAC/DC	I <sub>c</sub> < 10mA	2500A <sup>2</sup> s	
SO867070	75A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	7200A <sup>2</sup> s	
SO867970	75A	24-510VAC	1200V	20-265VAC/DC	I <sub>c</sub> < 10mA	7200A <sup>2</sup> s	
SO868070	95A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	14400A <sup>2</sup> s	
SO868970	95A	24-510VAC	1200V	20-265VAC/DC	I <sub>c</sub> < 10mA	14400A <sup>2</sup> s	
SO869070	125A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> < 13mA	24000A <sup>2</sup> s	
SO869970	125A	24-510VAC	1200V	20-265VAC/DC	I <sub>c</sub> < 10mA	24000A <sup>2</sup> s	
SO885060	50A	24-690VAC	1600V	3,5-32VDC	I <sub>c</sub> < 12mA	2500A <sup>2</sup> s	
SO885960	50A	24-690VAC	1600V	20-265VAC/DC	I <sub>c</sub> < 12mA	2500A <sup>2</sup> s	
SO887060	75A	24-690VAC	1600V	3,5-32VDC	I <sub>c</sub> < 12mA	7200A <sup>2</sup> s	
SO888060	95A	24-690VAC	1600V	3,5-32VDC	I <sub>c</sub> < 12mA	14400A <sup>2</sup> s	
SO889060	125A	24-690VAC	1600V	3,5-32VDC	I <sub>c</sub> < 12mA	24000A <sup>2</sup> s	

These products should be mounted on heatsinks in order to reach nominal current.

HIGH VOLTAGE  
RELAY

## S09 range

Typical applications : Resistive loads (AC-51)

- Zero cross
- Control status LED
- IP20 protection



### S09 range with regulated control current

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
<b>SO941460</b>	12A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	128A <sup>2</sup> s	45x58,5x30
<b>SO942460</b>	25A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	600A <sup>2</sup> s	
<b>SO943460</b>	35A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	1250A <sup>2</sup> s	
<b>SO945460</b>	50A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	2500A <sup>2</sup> s	
<b>SO963460</b>	35A	24-600VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	1250A <sup>2</sup> s	
<b>SO965460</b>	50A	24-600VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	2500A <sup>2</sup> s	
<b>SO967460</b>	75A	24-600VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	7200A <sup>2</sup> s	

### S09 range with simplified input

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
<b>SO942560</b>	25A	12-280VAC	600V	7-30VDC	I <sub>c</sub> <30mA	600A <sup>2</sup> s	45x58,5x30
<b>SO942860</b>	25A	12-280VAC	600V	15-32VAC/10-30VDC	I <sub>c</sub> <33mA	600A <sup>2</sup> s	
<b>SO942960</b>	25A	12-280VAC	600V	185-265VAC/DC	I <sub>c</sub> <10mA	600A <sup>2</sup> s	
<b>SO963560</b>	35A	24-600VAC	1200V	8-30VDC	I <sub>c</sub> <30mA	1250A <sup>2</sup> s	
<b>SO965560</b>	50A	24-600VAC	1200V	8-30VDC	I <sub>c</sub> < 30mA	2500A <sup>2</sup> s	
<b>SO967560</b>	75A	24-600VAC	1200V	8-30VDC	I <sub>c</sub> < 30mA	7200A <sup>2</sup> s	

These products should be mounted on heatsinks in order to reach nominal current.

## SOL flatpac® range

low profile (16,3mm high)

Flatpac® SSRs are mainly designed for applications where a PCB is used on the input, possibly on the output side. In fact the small size of this relay makes it easy to use when room is restricted. Wiring will be facilitated as this relay also allows input or output cables to go any direction.



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Specifications	Dimensions mm
<b>SOL745060</b>	50A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	1680A <sup>2</sup> s	Random	45x58,5x16,3
<b>SOL942460</b>	25A	12-280VAC	600V	3-32VDC	I <sub>c</sub> <13mA	600A <sup>2</sup> s	Zero-cross	
<b>SOL942960</b>	25A	12-280VAC	600V	185-265VAC/DC	I <sub>c</sub> <10mA	600A <sup>2</sup> s	Zero-cross	
<b>SOL965460</b>	50A	24-600VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	1680A <sup>2</sup> s	Zero-cross	

These products should be mounted on heatsinks in order to reach nominal current.

## SOR range

With removable input connector - Spring terminals :

- Designed for most types of loads.
- Zero cross with low zero-crossing level (<12V)
- Voltage protection on input (transil) and output (VDR) with very high immunity according to IEC/EN61000-4-4 and IEC/EN61000-4-5
- IP20 protection
- Control current <13mA for all the voltage range at any operating temperature
- Control status LED
- Double inputs



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
<b>SOR842074</b>	25A	12-275VAC	600V	3-32VDC	I <sub>c</sub> <13mA	600A <sup>2</sup> s	45x58,5x30
<b>SOR863070</b>	35A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	1250A <sup>2</sup> s	
<b>SOR865070</b>	50A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	2500A <sup>2</sup> s	
<b>SOR867070</b>	75A	24-510VAC	1200V	3,5-32VDC	I <sub>c</sub> <13mA	7200A <sup>2</sup> s	

These products should be mounted on heatsinks in order to reach nominal current.



## celpac® 2G

### The 22,5mm pitch SSR solution !

#### Performances & reliability :

- Fixing screws compatible with all hockey puck style relays (celduc SO and SC range),
- Maximum voltage up to 1600V (690VRMS), 600VAC and 1200VAC as standard,
- Thyristor rating up to 75A,
- Large input range : 3-32VDC with regulated current models
- AC input control available,
- Input status yellow LED,
- Over-voltage protection on input,
- New generation of TMS<sup>2</sup> technology for thyristors for a longer life expectancy,
- Quick and easy connections,
- Designed according to European standards EN60947-4-3 (IEC947-4-3) and EN60950 (VDE0805 reinforced insulation) -IEC62314-UL-cUL,
- IP20 protection with removable flaps (SU range) or cover (SA range),
- Other protection devices available as an option : RC snubber, VDR, self turn-on.

#### Price-effective and compact solution :

- The 22,5 mm pitch of our Solid State contactors reduces space to the minimum,
- Reduced assembling time, easy cabling,
- Reduced maintenance thanks to a very long life expectancy,
- One single screw driver for input and output.

**SA range :**  
with screw connection  
on inputs.



**SU range :**  
with pluggable connector on  
inputs.



## SA range

- Screw connection
- Transparent protective cover
- For mounting on your heatsink or panel mount.



**SA8** : designed for most types of loads.  
**SA9** : designed for resistive loads AC-51.

Product reference	Output voltage	Thyristor rating	V peak (V)	Control voltage	Specifications	Visualization & protection
<b>SA842070</b>	12-275VAC	25A	600V	3-32VDC	Zero-cross	LED, VDR
<b>SA941460</b>	12-280VAC	12A	600V	3-32VDC		LED
<b>SA942460</b>	12-280VAC	25A	600V	3-32VDC		
<b>SA943460</b>	12-280VAC	35A	600V	3-32VDC		
<b>SA945460</b>	12-280VAC	50A	600V	3-32VDC		
<b>SA963460</b>	24-600VAC	35A	1200V	3,5-32VDC		
<b>SA965460</b>	24-600VAC	50A	1200V	3,5-32VDC		

## SU range

- With pluggable connector on inputs
- Removable flaps for protection
- For mounting on your heatsink or panel mount.

**SU7** : designed for motors AC-53 and inductive loads. Also use in phase angle control systems.

**SU8** : designed for most types of loads.

**SU9** : designed for resistive loads AC-51.



Product reference	Output voltage	Thyristor rating	V peak (V)	Control voltage	Specifications	Visualization & protection
<b>SU765070</b>	24-510VAC	50A	1200V	3,5-32VDC	Random	LED
<b>SU842070</b>	12-275VAC	25A	600V	3-32VDC	Zero-cross	LED, VDR
<b>SU842770</b>	12-275VAC	25A	600V	17-30VAC/DC		
<b>SU842970</b>	12-275VAC	25A	600V	180-240VAC		
<b>SU865070</b>	24-510VAC	50A	1200V	3,5-32VDC		
<b>SU865970</b>	24-510VAC	50A	1200V	180-240VAC		
<b>SU867070</b>	24-510VAC	75A	1200V	3,5-32VDC		
<b>SU942460</b>	12-280VAC	25A	600V	3-32VDC		LED
<b>SU963460</b>	24-600VAC	35A	1200V	3,5-32VDC		
<b>SU965460</b>	24-600VAC	50A	1200V	3,5-32VDC		
<b>SU967460</b>	24-600VAC	75A	1200V	3,5-32VDC		

# celpac® 2G

## SAL/SAM range

**SAX9** : designed for resistive loads AC-51.

- Screw connection
- Transparent protective cover
- « Ready to use » on 22,5 and 45mm heatsinks.



Product reference	Output voltage	Thyristor rating	Max. switching current at 25°C	V peak (V)	Control voltage	Specifications	Visualization & protection
<b>SAL941460</b>	12-280VAC	12A	12A	600V	3-32VDC	Zero-cross	LED
<b>SAL942460</b>	12-280VAC	25A	23A	600V	3-32VDC		
<b>SAL963460</b>	12-280VAC	35A	30A	1200V	3,5-32VDC		
<b>SAL965460</b>	24-600VAC	50A	32A	1200V	3,5-32VDC		
<b>SAM943460</b>	12-280VAC	35A	35A	600V	3-32VDC		

## SUL/SUM range

**SUX8** : designed for most types of loads.

**SUX9** : designed for resistive loads AC-51.

- With pluggable connector on inputs
- Removable flaps for protection
- « Ready to use » on 22,5 and 45mm heatsinks



Product reference	Output voltage	Thyristor rating	Max. switching current at 25°C	V peak (V)	Control voltage	Specifications	Visualization & protection
<b>SUL842070</b>	12-275VAC	25A	23A	600V	3-32VDC	Zero-cross	LED, VDR
<b>SUL842970</b>	12-275VAC	25A	23A	600V	180-240VAC		
<b>SUL865070</b>	24-510VAC	50A	32A	1200V	3,5-32VDC		
<b>SUL865770</b>	24-510VAC	50A	32A	1200V	18-30VAC/DC		
<b>SUL865970</b>	24-510VAC	50A	32A	1200V	180-240VAC		
<b>SUL867070</b>	24-510VAC	75A	35A	1200V	3,5-32VDC		
<b>SUM865070</b>	24-510VAC	50A	45A	1200V	3,5-32VDC		
<b>SUL942460</b>	12-280VAC	25A	23A	600V	3-32VDC		LED
<b>SUL963460</b>	24-600VAC	35A	30A	1200V	3,5-32VDC		
<b>SUL965460</b>	24-600VAC	50A	32A	1200V	3,5-32VDC		
<b>SUL967460</b>	24-600VAC	75A	35A	1200V	3,5-32VDC		

## ESUC for SU/SUL range

### Current monitoring module

ESUC module is an option available for the celpac 2G range. Mounted on SU or SUL, this module provides users with diagnostic information for up to 5 heating elements in parallel.

- Permanent load current monitoring
- Current teaching function by push button or external logic input
- One alarm threshold : - 16% of Iteach
- Partial load break detection
- Open mains detection
- Open load detection
- Detection of short-circuited SSR



Product reference	Current range	Control
<b>ESUC0450</b>	2-40A	8-30VDC



## Power SSRs with diagnostics

Status of the SSR and the load (resistive load) without external power supply. This range is patented. Status output can be chained.

Fault condition alarms:

- Line or load open
- Short circuit output

## Diagnostic description

Control	Control LED	Mains	Load	SSR	Status LED	Etat du contact
0	○	Yes	OK	OK	●	closed
1	●	Yes	OK	OK	●	closed
0	○	No	OK	OK	○	open
1	●	No	OK	OK	○	open
0	○	Yes	–	OK	○	open
0	○	Yes	OK	short-circuit	○	open
1	●	Yes	–	OK	○	open
1	●	Yes	OK	short-circuit	○	open

## celpac®



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	I <sup>2</sup> t	Dimensions mm
<b>SILD845160</b>	32A	70-280VAC	600V	3-32VDC	I <sub>c</sub> <10mA	1500A <sup>2</sup> s	22,5x80x116
<b>SILD865170</b>	32A	150-510VAC	1200V	3,5-32VDC	I <sub>c</sub> <10mA	1500A <sup>2</sup> s	
<b>SILD867170</b>	35A	150-510VAC	1200V	3,5-32VDC	I <sub>c</sub> <10mA	5000A <sup>2</sup> s	

## okpac®



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
<b>SOD843180</b>	35A	50-265VAC	600V	7-30VDC	1 kΩ	1250A <sup>2</sup> s	45x58,5x33,6
<b>SOD845180</b>	50A	50-265VAC	600V	7-30VDC	1 kΩ	2500A <sup>2</sup> s	
<b>SOD849180</b>	125A	50-265VAC	600V	7-30VDC	1 kΩ	24000A <sup>2</sup> s	
<b>SOD865180</b>	50A	150-510VAC	1200V	5-30VDC	1 kΩ	2500A <sup>2</sup> s	
<b>SOD867180</b>	75A	150-510VAC	1200V	5-30VDC	1 kΩ	7200A <sup>2</sup> s	

The SOD products should be mounted on heatsinks in order to reach nominal current.

The SOD range is now available with a thermal switch for over-temperature protection. Please consult us.



## Softlife range Get rid of your heatsinks!

Relays combining the assets of dual technology : solid state and electromechanical. These relays are designed to switch current up to 30A without the need of heatsink. These relays have LED indicators, RC and VDR protection.



Product reference	Switching current	Switching voltage	Control voltage	I <sup>2</sup> t	Protec.	Specifications	Dimensions mm
SVX963350	30A	12-420VAC	20-30VDC	265A <sup>2</sup> s	RC-VDR	Mixed relay	44,5x61,3x45

## SF range

Miniature relays available with "FASTON" or PCB terminals.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Specifications	Dimensions mm
SF541310	10A	12-280VAC	4-30VDC	1 k $\Omega$	Zero-cross, "FASTON" terminals	21 x 35,5 x 15
SF542310	10A	12-280VAC	4-30VDC	1 k $\Omega$	Zero-cross, PCB terminals	
SF546310	20A	12-280VAC	4-30VDC	1 k $\Omega$	Zero-cross, "FASTON" terminals	

These products should be mounted on heatsinks in order to reach nominal current.

## SCF range

To control resistive loads. "FASTON" terminals.



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	I <sup>2</sup> t	Protec.	Dimensions mm
SCF42160	25A	12-280VAC	600V	4-30VDC	600 $\Omega$	yes	312A <sup>2</sup> s	—	44,5x58x33
SCF42324	25A	12-280VAC	600V	12-30VDC	1 k $\Omega$	no	312A <sup>2</sup> s	VDR	
SCF62160	25A	24-600VAC	1200V	5-30VDC	600 $\Omega$	yes	265A <sup>2</sup> s	—	

Other references (corresponding to the SC9 range) are available : please contact us.

These products should be mounted on heatsinks in order to reach nominal current.

E option "large Entraxe" and L option "Faston" 4,8mm on request.

## SCFL range EMC optimised (low electromagnetic emission – low RFI)

This relay is designed for use in applications where low electromagnetic emission is essential : household and electrical appliances, information technology and medical equipments. In compliance with EN 50081-1 Generic Emission Standards for Residential and meets CISPR 22 requirements.



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
SCFL42100	25A	12-280VAC	600V	4-30VDC	1 k $\Omega$	312A <sup>2</sup> s	44,5x58,2x32
SCFL62100	25A	24-440VAC	1200V	5-30VDC	1 k $\Omega$	312A <sup>2</sup> s	

These products should be mounted on heatsinks in order to reach nominal current.

## SP7/SP8 range

This new range extends the products available with FASTON terminals.

In a full plastic case, these relays can nevertheless switch up to 12 A AC51.

These relays are appropriate for any type of loads (such as heating or single-phase random motor) thanks to high immunity components and an integrated overvoltage protection combined with 800 Upeak power components. This range is well adapted to the food industry.



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm
SP752120	12A	12-280VAC	800V	3-32VDC	1 k $\Omega$	340A <sup>2</sup> s	Random	38x66,8x22
SP852120	12A	12-280VAC	800V	4-32VDC	1 k $\Omega$	340A <sup>2</sup> s	Zero-cross	

These products should be mounted on heatsinks in order to reach nominal current.

See also our okpac® range (pages 5 & 6)

## SC range

**SC7 range** with random or instant switching, integrating a snubber (RC) is especially designed for motor and transformer control.

**SC8 range** with zero-cross switching, integrating a snubber (RC), is recommended for all types of applications.

**SC9 range** with zero-cross switching is optimized for resistive load control (heating application).



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm	okpac equivalent
SC741110	12A	12-280VAC	600V	3-30VDC	1 kΩ	72A <sup>2</sup> s	44,5x58,2x27	SO745090
SC744110	40A	12-280VAC	600V	3-30VDC	1 kΩ	612A <sup>2</sup> s		SO745090
SC762110	25A	24-520VAC	1200V	4-30VDC	1 kΩ	265A <sup>2</sup> s		SO763090
SC764110	50A	24-520VAC	1200V	4-30VDC	1 kΩ	1500A <sup>2</sup> s		SO765090
SC764910	50A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	1500A <sup>2</sup> s		—
SC767110	75A	24-520VAC	1200V	4-30VDC	1 kΩ	5000A <sup>2</sup> s		SO767090
SC768110	95A	24-520VAC	1200V	4-30VDC	1 kΩ	11000A <sup>2</sup> s		SO768090
SC769110	125A	24-520VAC	1200V	4-30VDC	1 kΩ	20000A <sup>2</sup> s		SO769090
SC841110	12A	12-280VAC	600V	4-30VDC	1 kΩ	72A <sup>2</sup> s		SO842074
SC841910	12A	12-280VAC	600V	90-240VAC/DC	30 kΩ	72A <sup>2</sup> s		SO842974
SC842110	25A	12-280VAC	600V	4-30VDC	1 kΩ	312A <sup>2</sup> s		SO842074
SC844110	40A	12-280VAC	600V	4-30VDC	1 kΩ	612A <sup>2</sup> s		SO845070
SC844910	40A	12-280VAC	600V	90-240VAC/DC	30 kΩ	612A <sup>2</sup> s		SO865970
SC862110	25A	24-520VAC	1200V	5-30VDC	1 kΩ	265A <sup>2</sup> s		SO863070
SC864110	50A	24-520VAC	1200V	5-30VDC	1 kΩ	1500A <sup>2</sup> s		SO865070
SC864810	50A	24-520VAC	1200V	17-80VAC/DC	3 kΩ	1500A <sup>2</sup> s		SO863970
SC864910	50A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	1500A <sup>2</sup> s		SO863970
SC867110	75A	24-520VAC	1200V	5-30VDC	1 kΩ	5000A <sup>2</sup> s		SO867070
SC867910	75A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	5000A <sup>2</sup> s		SO867970
SC869110	125A	24-520VAC	1200V	5-30VDC	1 kΩ	20000A <sup>2</sup> s		SO869070
SC869910	125A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	20000A <sup>2</sup> s		SO869970
SC941160	12A	12-280VAC	600V	4-30VDC	600 Ω	72A <sup>2</sup> s		SO941460
SC942110	25A	12-280VAC	600V	4-30VDC	1 kΩ	312A <sup>2</sup> s		SO942460
SC942160	25A	12-280VAC	600V	4-30VDC	600 Ω	312A <sup>2</sup> s		SO942460
SC942900	25A	12-280VAC	600V	90-240VAC/DC	30 kΩ	312A <sup>2</sup> s		SO942960
SC944110	40A	12-280VAC	600V	4-30VDC	1 kΩ	612A <sup>2</sup> s		SO945460
SC945160	50A	12-280VAC	600V	4-30VDC	600 Ω	1500A <sup>2</sup> s		SO945460
SC947160	75A	12-280VAC	600V	4-30VDC	600 Ω	5000A <sup>2</sup> s		SO967460
SC962114	25A	24-600VAC	1200V	5-30VDC	1 kΩ	265A <sup>2</sup> s		SO863070
SC962160	25A	24-600VAC	1200V	5-30VDC	600 Ω	265A <sup>2</sup> s		SO963460
SC962960	25A	24-600VAC	1200V	90-240VAC/DC	30 kΩ	265A <sup>2</sup> s		SO863970
SC965160	50A	24-600VAC	1200V	5-30VDC	600 Ω	1500A <sup>2</sup> s		SO965460
SC967100	75A	24-600VAC	1200V	5-30VDC	1 kΩ	5000A <sup>2</sup> s		SO967460
SC967160	75A	24-600VAC	1200V	5-30VDC	600 Ω	5000A <sup>2</sup> s		SO967460

These products should be mounted on heatsinks in order to reach nominal current.  
Protective cover and heatsinks available : see accessories.

... see okpac® range (pages 5 & 6)



## Two phase relays

Our two phase range provides two solid state relays in a compact standard 45 mm enclosure. They are perfectly adapted to three phase applications with breaking of two phases only.

### SOB range – Dual okpac®

New 2 phase relays in okpac® IP20 housing. Removable connector for control allowing many wiring possibilities eg. FASTONS, springs, screw and so on (please consult us).

**SOB5** : power and control connections by FASTON terminals

**SOB6** : double input with connector CE100F ITWPANCON type or similar

**SOB7** : random

**SOB8** : zero-cross – designed for most types of loads

**SOB9** : zero-cross – resistive loads AC-51.

Connectors to be ordered separately



1



2



3

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm	Fig n°
<b>SOB542460</b>	2x25A	12-280VAC	600V	3-32VDC	I <sub>c</sub> < 13mA	600A <sup>2</sup> s	zero-cross / 2 controls	45x58,5x27	1
<b>SOB665300</b>	2x50A	24-600VAC	1200V	10-30VDC	1200 Ω	1680A <sup>2</sup> s	zero-cross / 2 controls		3
<b>SOB763670</b>	2x35A	24-510VAC	1200V	8-30VDC	1200 Ω	1250A <sup>2</sup> s	random / 2 controls		2
<b>SOB765670</b>	2x50A	24-510VAC	1200V	8-30VDC	1200 Ω	2500A <sup>2</sup> s	random / 2 controls		2
<b>SOB767670</b>	2x75A	24-510VAC	1200V	8-30VDC	1200 Ω	7200A <sup>2</sup> s	random / 2 controls		2
<b>SOB865660</b>	2x50A	24-600VAC	1200V	8-30VDC	1200 Ω	2500A <sup>2</sup> s	zero-cross / 2 controls		2
<b>SOB942360</b>	2x25A	24-280VAC	600V	10-30VDC	1200 Ω	600A <sup>2</sup> s	zero-cross / 1 control		2
<b>SOB942660</b>	2x25A	24-280VAC	600V	10-30VDC	1200 Ω	600A <sup>2</sup> s	zero-cross / 2 controls		2
<b>SOB963660</b>	2x35A	24-600VAC	1200V	10-30VDC	1200 Ω	1250A <sup>2</sup> s	zero-cross / 2 controls		2
<b>SOB965660</b>	2x50A	24-600VAC	1200V	10-30VDC	1200 Ω	2500A <sup>2</sup> s	zero-cross / 2 controls		2
<b>SOB967660</b>	2x75A	24-600VAC	1200V	10-30VDC	1200 Ω	7200A <sup>2</sup> s	zero-cross / 2 controls		2

On request : 1600V peak version, 75A version, overvoltage protection option available.

For SOB6 range : other rating on request, TVS (Transient Voltage Suppression) protection possible.

### SCB range



1



2



3

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm	Fig n°
<b>SCB564310</b>	2x40A	24-510VAC	1200V	5-30VDC	1 kΩ	610A <sup>2</sup> s	zero-cross / 2 controls	44,8x58,5x27	1
<b>SCB665300</b>	2x50A	24-600VAC	1200V	8-35VDC	1800 Ω	1500A <sup>2</sup> s	zero-cross / 1 control		2
<b>SCB865300</b>	2x50A	24-600VAC	1200V	10-30VDC	1400 Ω	1500A <sup>2</sup> s	zero-cross / 1 control		2
<b>SCB865600</b>	2x50A	24-600VAC	1200V	10-30VDC	1800 Ω	1500A <sup>2</sup> s	zero-cross / 2 controls		3
<b>SCB941300</b>	2x12A	12-280VAC	600V	8-30VDC	1 kΩ	72A <sup>2</sup> s	zero-cross / 1 control		2
<b>SCB942600</b>	2x25A	12-280VAC	600V	8-30VDC	1 kΩ	288A <sup>2</sup> s	zero-cross / 2 controls		3
<b>SCB962600</b>	2x25A	24-600VAC	1200V	8-30VDC	1 kΩ	265A <sup>2</sup> s	zero-cross / 2 controls		3
<b>SCB965600</b>	2x50A	24-600VAC	1200V	8-30VDC	1 kΩ	1500A <sup>2</sup> s	zero-cross / 2 controls		3

Protection cover : see accessories (1K470000).

These products should be mounted on heatsinks in order to reach nominal current.



## SCT range

Three phase solid state relays in a single phase relay enclosure (width 45mm).

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm
<b>SCT32110</b>	3x10A	12-440VAC	800V	4-30VDC	330 Ω	72A <sup>2</sup> s	random	44,8x58x27
<b>SCT62110</b>	3x10A	12-440VAC	800V	4-30VDC	330 Ω	72A <sup>2</sup> s	zero-cross	

These products also come with PCB terminals.

This product should be mounted with heatsink in order to reach nominal current.

## SGB range 2 legs Three Phase Solid State Relays

Our SGB range is designed for controlling three wire three phase loads connected in delta or, if balanced, connected in star without the neutral connection. Two of the three phases are switched by the SSR, the third being directly connected. This reliable solution can be easily integrated into a control system because of simplicity of wiring.

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm
<b>SGB967360E</b>	3x75A	24-600VAC	1200V	10-30VDC	550 Ω	7250A <sup>2</sup> s	zero-cross	100x75,15x46

## SGT range

These relays have LED indicators..

Product reference	Switching current AC-51	Switching voltage	Peak voltage	Control voltage	Input R	I²t	Specifications	Dimensions mm
SGT range with 40mm housing								
SGT867350	3x75A	24-600VAC	1200V	8-30VDC	620 Ω	5000A²s	Zero-cross / for most types of loads	100x73,5x39,5
SGT962360	3x25A	24-600VAC	1200V	8,5-30VDC	620 Ω	265A²s		
SGT965360	3x50A	24-600VAC	1200V	8,5-30VDC	620 Ω	1500A²s	Zero-cross / for resistive loads AC-51	
SGT965960	3x50A	24-600VAC	1200V	90-240VAC	21 kΩ	1500A²s		
SGT967360	3x75A	24-600VAC	1200V	8,5-30VDC	620 Ω	5000A²s		
SGT range with 47,6mm housing and square terminals								
SGT767470E	3x75A	24-520VAC	1200V	4-32VDC	ic<25mA	7250A²s	Random / for most types of loads	100x75,15x46
SGT769360E	3x125A	24-520VAC	1200V	8,5-30VDC	21 kΩ	20000A²s		
SGT865470E	3x50A	24-520VAC	1200V	4-32VDC	ic<25mA	2500A²s	Zero-cross / for most types of loads	
SGT965360E	3x50A	24-600VAC	1200V	10-30VDC	550 Ω	2500A²s		
SGT967360E	3x75A	24-600VAC	1200V	10-30VDC	550 Ω	7250A²s	Zero-cross / for resistive loads AC-51	
SGT967760E	3x75A	24-600VAC	1200V	10-24VAC	400 Ω	7250A²s		
SGT967960E	3x75A	24-600VAC	1200V	90-240VAC	21 kΩ	7250A²s		
SGT968360E	3x95A	24-600VAC	1200V	10-30VDC	21 kΩ	7250A²s		

These products should be mounted with heatsink in order to reach nominal current.

## SVT range

Three phase IP20 protection range to control resistive loads (AC-51) or for motor control (AC-53). These relays have LED. Please consult us for other loads.

Product reference	Switching current AC-51	Switching current AC-53	Switching voltage	Thyristor rating	Control voltage	Input R	I <sup>2</sup> t	Protec.	Specifications	Dimensions mm
SVT range with 40mm housing										
SVT764394	3x50A	3x12A	24-520VAC	50A	8,5-30VDC	620 Ω	1500A²s	RC-VDR	Random	100x76x56,5
SVT864374	3x50A	3x12A	24-520VAC	50A	10-32VDC	580 Ω	1500A²s	VDR		
SVT867394	3x75A	3x24A	24-520VAC	75A	8,5-30VDC	620 Ω	5000A²s	RC-VDR	Zero-cross	
SVT867994	3x75A	3x24A	24-520VAC	75A	90-240VAC	620 Ω	5000A²s	RC-VDR	/ for most	
SVT869394	3x125A	3x32A	24-520VAC	125A	8,5-30VDC	620 Ω	20000A²s	RC-VDR	types of loads	
SVT869994	3x125A	3x32A	24-520VAC	125A	90-240VAC	21 kΩ	20000A²s	RC-VDR		
SVT965360	3x50A	–	24-600VAC	50A	8,5-30VDC	620 Ω	1500A²s	–	Zero-cross /	
SVT965760	3x50A	–	24-600VAC	50A	10-30VAC/DC	410 Ω	1500A²s	–	for resistive	
SVT967360	3x75A	–	24-600VAC	75A	8,5-30VDC	620 Ω	5000A²s	–	loads AC-51	
SVT967960	3x75A	–	24-600VAC		90-240VAC	21 kΩ	1500A²s			
SVT range with 47,6mm housing										
SVT864394E	3x50A	3x12A	24-520VAC	50A	8,5-30VDC	620Ω	1500A²s	RC-VDR	Zero-cross / for	100x76x56,5
SVT868394E	3x95A	3x24A	24-520VAC	95A	8,5-30VDC	620Ω	11000A²s	RC-VDR	most types of loads	
SVT965460E	3x50A	–	24-600VAC	50A	4-32VDC	ic<25mA	1500A²s	–	Zero-cross /	
SVT965960E	3x50A	–	24-600VAC	50A	90-240VAC	21 kΩ	1500A²s	–	for resistive	
SVT967360E	3x75A	–	24-600VAC		8,5-30VDC	21 kΩ	1500A²s	–	loads AC-51	

These products should be mounted with heatsink in order to reach nominal current.

# THREE PHASE MOTOR CONTROL



www.celduc.com

## SWT / SIT range solid state contactors

Three phase contactor with heatsink and DIN rail mounting. Fitted with a LED indicators, and RC and VDR network protection designed to control resistive loads (AC-51) or for motor control (AC-53).



Product reference	Switching current AC-51	Switching current AC-53	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Specifications	Dimensions mm	Fig n°
SIT865390	3X22A	3x12A	24-510VAC	1200V	10-30VAC/DC	410 Ω	1500A <sup>2</sup> s	Zero-cross	90x98x122	1
SIT865570	3X22A	—	24-510VAC	1200V	10-30VDC	560 Ω	1500A <sup>2</sup> s			1
SIT865990	3X22A	3x12A	24-510VAC	1200V	90-240VAC	21 kΩ	1500A <sup>2</sup> s			1
SWT860330	3x5A	3x5A	24-520VAC	1200V	10-30VAC/DC	410 Ω	265A <sup>2</sup> s	Zero-cross	83x76x72	2
SWT861730	3x28A	3x16A	24-520VAC	1200V	10-30VAC/DC	410 Ω	5000A <sup>2</sup> s		110x100x172	3
SWT861790	3x28A	3x16A	24-520VAC	1200V	90-240VAC	21 kΩ	5000A <sup>2</sup> s			3
SWT862030	3x32A	3x24A	24-520VAC	1200V	10-30VAC/DC	410 Ω	11000A <sup>2</sup> s			3
SWT862090	3x32A	3x24A	24-520VAC	1200V	90-240VAC	21 kΩ	11000A <sup>2</sup> s			3
SWT865080	3x50A	—	24-520VAC	1200V	10-30VAC/DC	410 Ω	5000A <sup>2</sup> s		110x145x172	3

These products are defined with temperature rises of 50°C and permanent operation (operating cycle = 100%) of 8 hours in compliance with the European standards.

## AC Reversing switches - SG9, SV9 & SW9



This relay is used to reverse the rotational direction of a motor.

The SW9 series is ready to use with heatsink and DIN rail mounting integrated.

They all supplied with LED indicators and protection against simultaneous controls.


Product reference	Switching current AC-53	Switching voltage	Control voltage	I <sup>2</sup> t	Protec.	Specifications	Dimensions mm	Fig n°
SG969100	3x6,6A	24-520VAC	10-30VDC	612A <sup>2</sup> s	reversing + time delay	3 phase switching	100x73,5x39,5	1
SG969300	3x8,5A	24-520VAC	12-30VDC	1500A <sup>2</sup> s		2 phase switching	100x73,5x39,5	1
SV969300	3x8,5A	24-520VAC	12-30VDC	1500A <sup>2</sup> s		2 phase switching IP20 enclosure	100x76x56,5	4
SV969500	3x16A	24-550VAC	12-30VDC	5000A <sup>2</sup> s		2 phase switching IP20 enclosure	100x76x56,5	4
SW960330	3x4,5A	24-550VAC	12-30VDC	1500A <sup>2</sup> s		2 phase switching	100x76x72	3
SW961230	3x8,5A	24-520VAC	12-30VDC	1500A <sup>2</sup> s		2 phase switching	83x90x155	2

Standard housing 40mm.  
Available in 47,6mm (E suffix):  
please contact us




4 = 3 without  
DIN rail


## Wiring examples – Three-phase applications

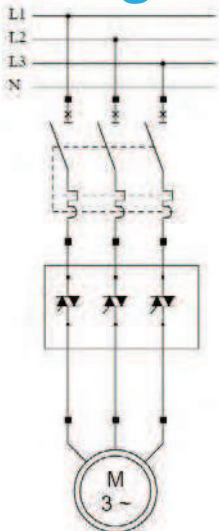


Three-phase SSR  
SVT8/SGT8 controlling a  
three-phase motor with a  
thermal - magnetic  
protection.

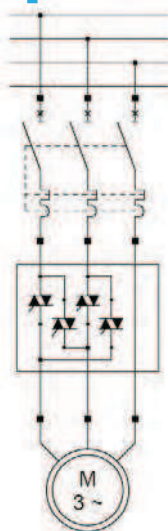


Motor reverser SV9  
for three-phase  
asynchronous  
motor

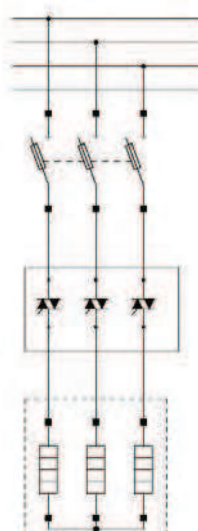

Three-phase SSR SVT9/  
SGT9 to control heaters  
connected in star with fuses  
protection.

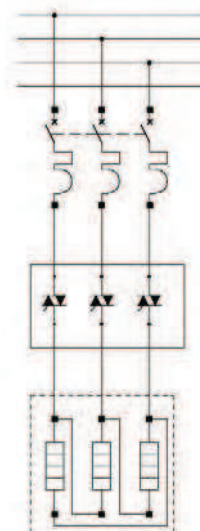

Three-phase SSR  
SVT9/SGT9 to control  
heaters connected in  
delta with circuit-breaker.

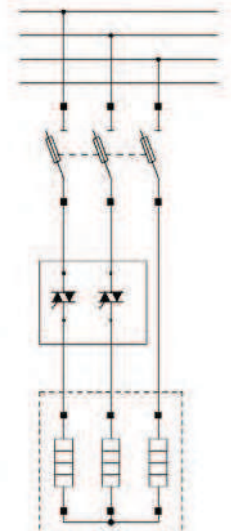

Two-phase SSR SOB9 to  
control heaters connected  
in star with fuses  
protection.

## SMCV & SMCW range AC Softstarter

### Motor control :

- Efficient reduction of torque and starting current.

### Incandescent or infrared lamp starting :

- Reduction of in rush current
- Increase in life expectancy.

### Transformer control (loaded) :

- Elimination of saturation current
- Improved control and protection.

### Whatever your application :

- Diagnostic monitoring of line, load & supply as well as normal operational status
- Better balance of and less interference on starters (full control of the 3 phases!)
- Simple use easing implementation and adjustments
- As compact as an electronic contactor.



1



2



3



4



5

Product reference	Pmax motor 400VAC		Pmax motor 230VAC		Max. Current AC53a		Specifications	Dimensions mm	Fig n°
	Y*	D*	Y*	D*	Max.	EN60947-4-2			
SMCV6080	7,5kW	13kW	4,3kW	7,5kW	16A	11,5A	Heatsink not provided	100x76x58,5	1
SMCV6110	11kW	19kW	6,4kW	11kW	25A	15,5A			
SMCV6150	15kW	26kW	8,6kW	15kW	30A	22,5A			
SMCW6020	2,5kW	4,3kW	1,4kW	2,5kW	5,6A	4A	Supplied with built-in heatsink	83x110x74	2
SMCW6080	7,5kW	13kW	4,3kW	7,5kW	16A	11,5A		83x110x155	3
SMCW6110	11kW	19kW	6,4kW	11kW	25A	15,5A		110x110x180	4
SMCW6150	15kW	26kW	8,6kW	15kW	30A	22,5A		110x141x180	5
SMCW6151	15kW	26kW	8,6kW	15kW	30A (AC53b)	22,5A (AC53b)	Ext. Bypass required	83x110x74	2

### Common characteristics

Values given at 40°C ambient

### Range of voltage and network frequency

200-480VAC  
40-65Hz

### Control

10-24VDC  
or contact

### Diagnostic output

0-24V 1A AC/DC

### Operating temperature

-40°C +100°C

### Insulation

4kV



### Max. section of wires

E=2,5mm²  
S=10mm²

\*The star assembly (Y) corresponds to in-line wired starter.

The delta assembly (D) corresponds to the starter wired in the triangle coupling of the motor.  
Each channel is wired in series with a winding of the motor.

## XKRD & SGRD range Reversing switches for DC motor control



1



2

The ready to use module XKRD30506 for Din-Rail mounting comprises 4 Solid State relays wired as a reverser to be used to change the direction of a DC motor (100W @ 24Vdc).

Control voltage ranges from 7 to 30VDC and this module can switch up to 5A/60VDC. A voltage clamp device is integrated and offers an input-output isolation of 2500VRMS.

Our SGRD reversing unit for DC motor control offers all the necessary built-in control protections including protection against wiring errors or short circuit on the input. This version includes the interlocking function to avoid control of the two directions at the same time.


Control voltage ranges from 8 to 36VDC and this SSR can switch up to 10A/36VDC.

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Protec.	Dimensions mm	Fig n°
XKRD30506	5A	7-36VDC	60V	7-30VDC	12-58mA	VDR	58,2x76,4x53	1
SGRD1006	10A	8-36VDC	60V	8-36VDC	20mA	Voltage and current	100x73,5x50,9	2

DC speed variation possible – please consult us



# PHASE ANGLE SINGLE PHASE



## Slx4 /S04 range

### New generation of proportional controllers

This range comes in celpac® housing (ready to use) and okpac® housing (to be mounted on a heatsink).

This range is designed for resistive loads.

SO465620 is a SSR based phase angle controller with PWM control input (linear power law response).



1



2



3

SO4 housing with different control connections.

Other functions possible : phase angle control, full wave pulse control, fast burst control Soft-Starter, timers and flashing relay, ... - please consult us.

Product reference	Switching current	Switching voltage	Control voltage	Dimensions mm	External power supply required ?	Fig n°
SIL465000	22A	160-450VAC	0-10V	22,5x80x11	no	1
SIM465000	32A	160-450VAC	0-10V	45 x 80 x 116	no	2
SO445020	50A	100-280VAC	0-10V	45x58,2x27	yes	3
SO465020	50A	200-480VAC	0-10V		yes	
SO468020	95A	200-480VAC	0-10V		yes	
SO469020	125A	200-480VAC	0-10V		yes	
SO445120	50A	100-280VAC	0-5V		yes	
SO468120	95A	200-480VAC	0-5V		yes	
SO469120	125A	200-480VAC	0-5V		yes	
SO467501	75A	160-450VAC	1-5V		no	
SO445320	50A	100-280VAC	Potentiometer		yes	
SO465320	50A	200-480VAC	Potentiometer		yes	
SO445420	50A	90-265VAC	4-20mA		no	
SO465420	50A	200-480VAC	4-20mA		no	
SO467420	75A	200-480VAC	4-20mA		no	
SO468420	95A	200-480VAC	4-20mA		no	
SO469420	125A	200-480VAC	4-20mA		no	
SO465620	50A	200-480VAC	PWM		yes	

## S04 range - Single phase softstarters

This range of single-phase softstarters is designed for universal motors or lamps.



1

2 = 1 with integrated heatsink

Product reference	Switching voltage	Switching current	Control voltage	Dimensions mm	Fig n°
SO400200	200-260VAC	35A	Soft-starter	45x58,2x27	1
SO400300	200-260VAC	40A*			2

\*Value given at 25°C ambient

For the softstart of other loads (transformers, single-phase motors, ...) please consult us.

## SG4 range - Phase angle controller

This relay is designed to proportionally vary the switching point on a sinusoidal mains supply via an isolated analogue control signal thereby varying the RMS voltage at the terminals of the load. Applications : light dimmer, heating regulation, single phase variable speed control (vibrating feeders, etc).

Model with LED and RC and VDR network.



Product reference	Switching current	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
SG441020	10A	115-265VAC	0-10VDC	400 kΩ	72A <sup>2</sup> s	100x73,5x39,5
SG444020	40A	115-265VAC	0-10VDC	400 kΩ	1500A <sup>2</sup> s	
SG464020	40A	200-460VAC	0-10VDC	400 kΩ	1500A <sup>2</sup> s	
SG468020	70A	200-460VAC	0-10VDC	400 kΩ	5000A <sup>2</sup> s	
SG469020	110A	200-460VAC	0-10VDC	400 kΩ	20000A <sup>2</sup> s	
SG444120	40A	115-265VAC	Potentiometer	200 kΩ	1500A <sup>2</sup> s	
SG464120	40A	200-460VAC	Potentiometer	200 kΩ	1500A <sup>2</sup> s	
SG469120	110A	200-460VAC	Potentiometer	200 kΩ	20000A <sup>2</sup> s	
SG444420	40A	115-265VAC	4-20mA	250 Ω	1500A <sup>2</sup> s	
SG464420	40A	200-460VAC	4-20mA	250 Ω	1500A <sup>2</sup> s	
SG468420	70A	200-460VAC	4-20mA	250 Ω	5000A <sup>2</sup> s	
SG469420	110A	200-460VAC	4-20mA	250 Ω	20000A <sup>2</sup> s	


These products should be mounted on heatsink in order to reach nominal current.

NEW

## S03 range Burst control mode ( $\mu$ P based unit)

This control mode is particularly suitable for resistive loads having a low thermal inertia like short wave Infra Red sources (IR lamps). It allows a very fine control of power according to the analogue input signal while reducing noise emission level (EMC conducted emissions).

This control mode consists in switching streams of full sine waves equally distributed along a fixed modulation period (TM) function of the analogue input signal. The  $\mu$ P constantly computes the number of full sine waves to be switched along the TM period.




Product reference	Switching current	Switching voltage	Control voltage	Dimensions mm
<b>SO367001</b>	75A	400VAC	0-10VDC	45x58,2x27

Other power rating and / or control on request.

## SG5 range Full wave pulse controllers

This relay has an analog input isolated from the mains to proportionally vary the cyclic operating ratio of a load (t/T). Control and mains are synchronous and output only has full periods. Models supplied with LED indicators together with RC & VDR network protection.

Application :  
Heating control

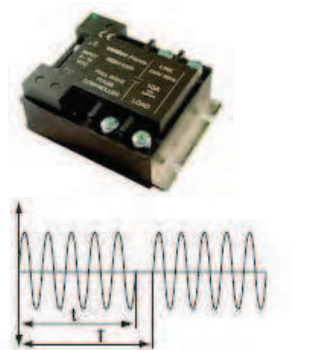

Product reference	Switching current	Switching voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm
<b>SG541020</b>	10A	230VAC	0-10VDC	250 $\Omega$	72A <sup>2</sup> s	100x73,5x39,5
<b>SG544020</b>	40A	230VAC	0-10VDC	350 $\Omega$	610A <sup>2</sup> s	
<b>SG564020</b>	40A	400VAC	0-10VDC	250 k $\Omega$	610A <sup>2</sup> s	
<b>SG541120</b>	10A	230VAC	Potentiometer	1 M $\Omega$	72A <sup>2</sup> s	
<b>SG564120</b>	40A	400VAC	Potentiometer	1 M $\Omega$	610A <sup>2</sup> s	
<b>SG541420</b>	10A	230VAC	4-20mA	350 $\Omega$	72A <sup>2</sup> s	
<b>SG564420</b>	40A	400VAC	4-20mA	350 $\Omega$	610A <sup>2</sup> s	

For higher power ratings and three phase applications, ask for our application notes.  
These products should be mounted on heatsink in order to reach nominal current.

## SWG5 range Single phase power controllers

This range is based on the SG5 controllers. The SWG5 are fitted with heatsinks and DIN rail adapters

Application :  
single phase heaters




Product reference	Switching power	Switching voltage	Control voltage	Input R	Dimensions mm
<b>SWG50210</b>	2kW	230VAC	0-10VDC	250 k $\Omega$	100x74x56
<b>SWG50810</b>	8kW	230VAC	0-10VDC	250 k $\Omega$	100x110x96

Control voltage 0-5V or potentiometer on requests.

## SWG8 range Three phase power controllers

The SWG8 controllers consist of a control unit (0 to 10 VDC input) and a power unit adapted to three phase load. The control unit has got an analogue input, isolated from the mains, that can proportionally alter the power to the load.

Application :  
three-phase heaters



Product reference	Switching power	Switching voltage	Control voltage	Input R	Control unit dimensions mm	Power unit dimensions mm
<b>SWG81510</b>	20kW	400VAC	0-10VDC	250 k $\Omega$	100 x 74 x 56	45x80x120
<b>SWG82710</b>	27kW					2x(83x110x130)
<b>SWG83610</b>	36kW					2x(110x110x154)
<b>SWG84210</b>	42kW					2x(110x110x154)
<b>SWG84810</b>	48kW					2x(110x110x154)
<b>SWG86010</b>	60kW					2x(110x110x154)
<b>SWG88010</b>	80kW					2x(110x145x154)

# THREE PHASE PROPORTIONAL CONTROLLERS

## SVTA-SWTA range

### Three phase universal digital proportional controllers

- Allows control of any type of loads (except capacitive) 3 or 4 wires (neutral), delta or star wiring :
  - Resistive loads for temperature control (infrared lamps, kilns, resistors, ...)
  - Resistive loads for light control (bulbs, halogen, UV, scenes, ...)
  - Loads including a transformer, a coil or a rectifier for voltage control (power supplies, high voltage generators, ...)
  - Motors for voltage speed control (Possibility to reduce the speed depending on the type of motor and machine, motor fans, ...)
- Six thyristor proportional phase angle controller (Three phase positive and negative cycle control) : Balanced currents, less harmonics, ...
- Softstart and softstop ramps (Increases the lifetime expectancy of the assembly)
- Diagnostic functions.
- Compact housing

Ready to use – values given at 25°C ambient

Product reference	Max. current AC-51	Max. current AC-53a	Control	Dimensions mm	Fig n°
<b>SWTA4610</b>	7A	7A	0-10V	83x110x74	1
<b>SWTA4620</b>	22A	16A	0-10V	83x110x155	2
<b>SWTA4630</b>	32A	25A	0-10V	110x110x180	3
<b>SWTA4650</b>	50A	30A	0-10V	110x141x180	4
<b>SWTA46501 (*)</b>	50A	30A	0-10V	110 x141x180	4
<b>SWTA4631</b>	32A	25A	Potentiometer	110x110x180	3
<b>SWTA4634</b>	32A	25A	4-20mA	110x110x180	3

\* Fan 24 VDC

Products to be mounted on a heatsink

Product reference	Max. current AC-51	Max. current AC-53a	Control	Dimensions mm	Fig n°
<b>SVTA4650</b>	50A	16A	0-10V	100x76x58,5	5
<b>SVTA4690</b>	125A (**)	30A	0-10V		
<b>SVTA4651</b>	50A	16A	Potentiometer		
<b>SVTA4691</b>	125A (**)	30A	Potentiometer		
<b>SVTA4684</b>	95A (**)	25A	4-20mA		
<b>SVTA4694</b>	125A (**)	30A	4-20mA		

\*\* Max. wire size = 10mm² : double wires or use special adaptors for current > 50A.  
Please refer to the mounting instructions.

No external power supply required

## SGTA range

Our SGTA range is a complementary range to the three-phase proportional controllers SVTA-SWTA.

- Price-effective range
- Adapted to three phase star connected resistive loads (or delta connected loads on request)
- Small housing
- Wide mains frequency variation (40-65Hz)
- Built-in overvoltage protection
- High I<sup>2</sup>t power elements
- Fully optoisolated full cycle three phase phase angle controller (balanced currents, less harmonics, ...)
- The minimum voltage applied on the load is the lowest in the market (3% RMS on the nominal voltage against 40% RMS offered by our competitors !)
- Lots of possible options on request
- Manufactured in compliance with major international standards EMC, LVD, UL, VDE.

Typical applications :

- Resistive loads for temperature control (infrared lamps, kilns, resistors, ...)
- Resistive loads for light control (bulbs, halogen, scenes, ...)

Product reference	Max. current AC-51	Switching voltage	Control	Dimensions mm
<b>SGTA4650</b>	50A	300-510VAC	0-10V	75,15x100x46
<b>SGTA4651</b>	50A	300-510VAC	0-5V	
<b>SGTA4653</b>	50A	300-510VAC	Potentiometer	
<b>SGTA4654</b>	50A	300-510VAC	4-20mA	

These products should be mounted on heatsink in order to reach nominal current.  
Other rating on request – consult us.



8-32V external power supply required

## SCQ range

### Four-Leg Solid State Relays

4 single phase SSRs in a SC case - save place in control panels (width 45 mm).

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	I <sup>2</sup> t	Dimensions mm	Led
<b>SCQ842000</b>	4x25A	12-280VAC	600V	3-32VDC	I<10mA	288A²s	44,5x58,2x274	no
<b>SCQ842060</b>	4x25A	12-280VAC	600V	3-32VDC	I<10mA	288A²s		yes

These products should be mounted on heatsink in order to reach nominal current.






## DC Solid State Relays

These relays are designed to switch DC loads e.g solenoid valves, brakes, indicators, motors (possibly on AC mains under specific conditions). All possible technologies can be available :

- **MOSFET**  
for applications where overcurrent capability and low dissipated power are needed.
- **BIPOLAR**  
for applications where low control current is needed.
- **IGBT**  
for high voltage applications (> 600 VDC).

For each application the corresponding technology - up to 1200VDC, 150A.  
In development: DC SSR for high current (400A) - for others, please contact us.

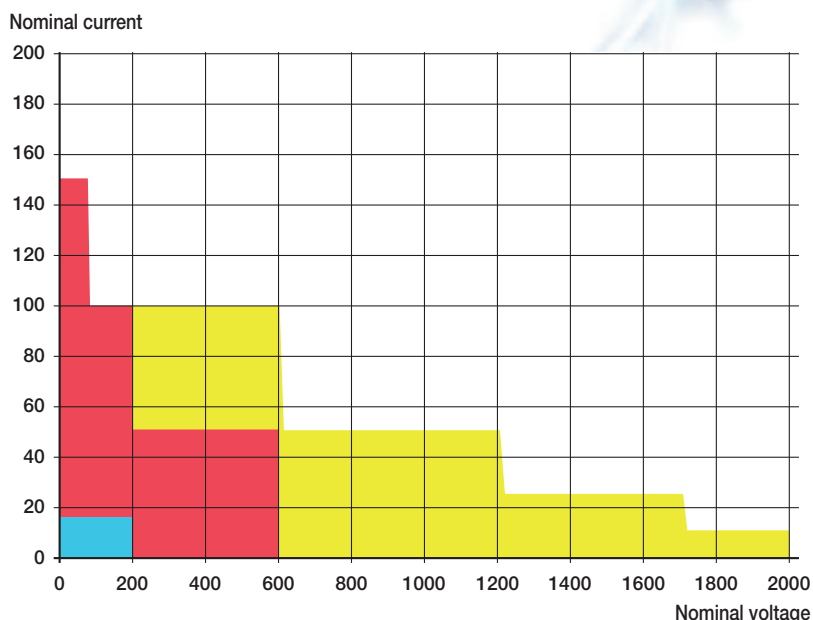

## MOSFET Technology



	Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Integrated protection	Dimensions mm	Fig n°
1	SLD01210	2,5A	0-60VDC	60V	3-10VDC	5,5-27mA	Transil	28 x 5 x 15	1
	SLD03210	2,5A	0-60VDC		18-32VDC	5,5-10,2mA			
	SLD01205	4A	0-32VDC		3-10VDC	5,5-27mA			
	SLD02205	4A	0-32VDC		7-20VDC	5,5-18mA			
2	SLD03205	4A	0-32VDC	60V	18-32VDC	5,5-10,2mA	Transil	29x12,7x15,7 29x12,7x25,4	2
	STD03505	5A	0-30VDC		12-30VDC	4,1-12mA			
	SPD03505	5A	0-30VDC		12-30VDC	4,1-12mA			
3	SKLD10510	8A	7-60VDC	100V	3-10VDC	6-30mA	Transil	43,6x6,3x24,5	3
	SKLD30510	8A	7-60VDC	100V	7-30VDC				
	SKLD11006	12A	7-36VDC	60V	3-10VDC				
	SKLD31006	12A	7-36VDC	60V	7-30VDC				
4	SCM030200	30A	0-200VDC	200V	4,5-32VDC	25-42mA	-	44,5x58,2x27	4
	SCM040600	40A	0-600VDC	600V					
	SCM0100200	100A	0-200VDC	200V					
	SCM0150100	150A	0-100VDC	100V					
5	SOM02060	20A	5-40VDC	60V	3,5-32VDC	30-35mA	Transil	45x58,5x30	5
	SOM020100	20A	5-60VDC	100V					
	SOM020200	20A	5-110VDC	200V					
	SOM04060	40A	5-40VDC	50V					
	SOM040100	40A	5-60VDC	100V					
	SOM040200	40A	5-110VDC	200V					
	SOM06075	60A	5-40VDC	75V					
6	ESO01000	0-80A	0-130VDC	200V	Protection against line inductance (C1, D2) : option for SOM range		Diode + capacitor	45x58,5x30	5
	XKLD0020	4A	1-32VDC	200V	18-32VDC	15-30mA	VDR+diode diode	36x78x61	6
7	XKLD31006	10A	12-36VDC	60V	10-30VDC	9-20mA		12,2x76,4x53	7

## BIPOLAR Technology



7



8



9



10

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Integrated protection	Dimensions mm	Fig n°
SKD10306	3A	2-60VDC	60V	3-30VDC	1-30mA	Diode	43,2x10,2x25,4	7
XKD10120	1A	2-220VDC	220V	5-30VDC	1-30mA	Diode	12,2x76,4x53	8
XKD10306	3A	2-60VDC	60V	5-30VDC	1-30mA			
XKD11306D	3A	2-60VDC	60V	3-30VDC	5-30mA			
XKD70306	3A	2-60VDC	60V	10-30VAC/DC	2-14mA			
XKD90306	3A	2-60VDC	60V	90-240VAC/DC	2-5,7mA			
SCC10506	5A	2-60VDC	60V	3-16VDC	1-30mA	Diode	44,5x58,2x27	9
SCC20506	5A	2-60VDC		10-32VDC				
SCC11506	15A	2-60VDC		3-16VDC				
SCC21506	15A	2-60VDC		10-32VDC				
SCC21520	15A	2-200VDC	300V	10-32VDC	Transil			
SGC20420	20A	2-200VDC	300V	3-30VDC	1-30mA	Transil	67 x 38 x 37,5	10

## IGBT Technology



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Integrated protection	Dimensions mm
SCIO251700	25A	0-1700VDC	1700V	4,5-32VDC	25-42mA	Reverse diode	44,5x58,2x27
SCIO501200	50A	0-1200VDC	1200V	4,5-32VDC	25-42mA	Reverse diode	
SCIO100600	100A	0-600VDC	600V	4,5-32VDC	25-42mA	Reverse diode	

Products without integrated over-voltage protection (transil or VDR) or having only a Freewheel diode, must be fitted with an external overvoltage protection. The maximum operating voltage is then often reduced to the half of the specified maximum operating voltage.

## Applications

**DC power supplies** (converters like choppers, inverters, ...)

**Signal switching** (testing equipment, ...)

**Electro-magnets** (induction motor braking, ...)

**Heaters** (air conditioning in trains, tramways, ...)

**Batteries** (ships, solar systems, ...)

**DC Motors** (travelling cranes, cranes, vehicles, ...)



On request : « ready to use » products i.e. products including integrated voltage protection, proportional controllers, DC motor reversers ...

Please consult us !

## Special Relays



### Shunting relays : SAS Relays

Airport beacon relay.

If a lamp fails, the relays short circuit this lamp.

Different configurations available.



### Dry contact relays : SG241010 relay

230VAC mains.

12A output voltage.

Control by PLA type insulated contact

Typical applications : heating breaking, etc



### Flashing relays : ST relays

ST645000: flashing 1/2Hz 230VAC 15A.

ST647000: flashing 1/2Hz 230VAC 25A.

## Special customer products

celduc® relais is a specialist in adapting designs to specific customer applications.

In addition to the very large range of solid state relays, celduc® design specific products according to the customers specifications or adapt products to the customers needs if prices and volumes can justify such developments.

Please do not hesitate to consult us.



4 SKL SSRs on PCB




### This device using SSRs controls AC motors in hazardous area.

Control by pushbutton with embedded magnet actuating Reed switches.



### Solid state contactor for 3 phase motor.

Dry contact control  
Spring terminals.



PCB for single-phase motor softstart



### Special development composed of SU SSRs and ESUC modules

to control 9 heating elements with partial load break detection. This system includes all protections.



Motor reverser with 2 electronic cards included 5 SSRs.


## Applications notes

Application notes on request : a certain number of application notes are available to celduc® customers :

- Principle of solid state relays.
- Life expectancy of solid state relays: TMS<sup>2</sup> technology.
- Short circuit protection of solid state relays : fuses and circuit breakers.
- Solid state relays on resistive loads (heating application).
- Three phase motor.
- Transformer control.
- Incandescent lamp control.
- Discharge lamp control / Application of three phase diagnostic.
- Our products in equipment for the food industry.
- Our products in equipment for the packing industry.
- Our products in equipment for the textile industry.
- Solid state relays in emergency power supplies (UPS).
- Solid state relays on capacitive loads : power factor corrector (PFC) application.
- Application of SKL et SKH relays.
- Softstart and reversing relays.
- Softstart relays in transformer control.
- Softstart relays in incandescent and infrared lamp control.
- Our products in equipment for the electronic industry.
- Our products in equipment for the train industry.
- Our products in equipment for the renewable energy.



## Heatsinks

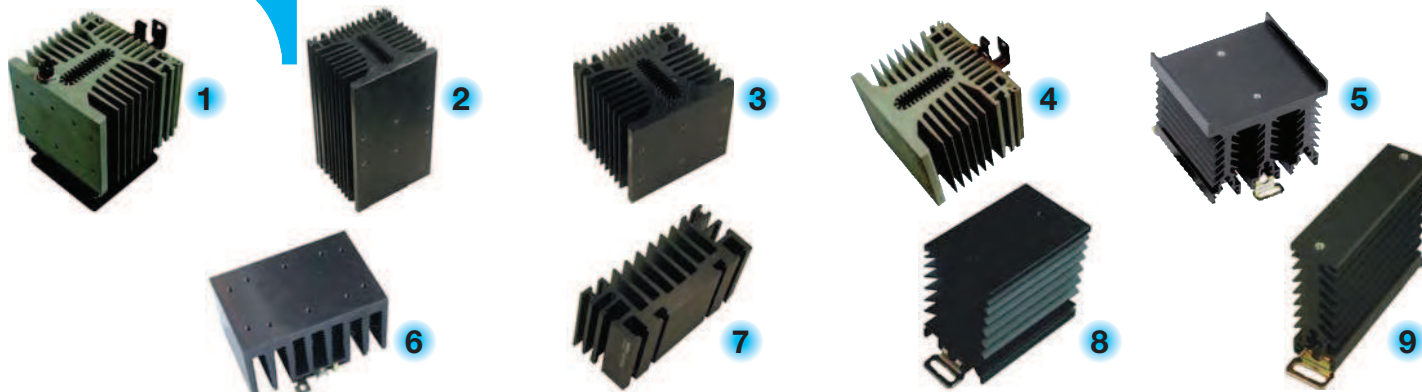

Product reference	Thermal characteristics	Specifications	Dimensions mm	Relay type	Fig n°
WF031100	0,3K/W	ventiled for DIN rail or screw	110x120x145	SO, SC, SG, SGT, SVT	1
WF050000	0,55K/W	DIN rail adaptor as option	110x100x200	SO, SC, SG, SGT, SVT	2
WF070000	0,75K/W	DIN rail adaptor as option	110x100x100	SO, SC, SG, SGT, SVT	3
WF115100	0,9K/W	for DIN rail or screw	110x100x90	SO, SC, SG, SGT, SVT	4
WF108110	1,1K/W	for DIN rail or screw	89,8x81x98,02	SO, SC	5
WF121000	1,2K/W	for DIN rail or screw	100x40x100	SO, SC, SG, SGT, SVT	6
WF210000	2,1K/W	DIN rail adaptor as option	96x41x55	SO, SC	7
WF151200	2,2K/W	for DIN rail or screw	45x73x80	SO, SC, SA, SU	8
WF311100	3K/W	for DIN rail or screw	22,5x73x80	SA, SU	9

The Rth values are given for a temperature of 50°C in calm air. Other dimensions available on request.

## Accessories



### PROTECTION COVERS / FLAPS


1K199000	protection cover for SGT/SG9
1K460000	protection cover for SC range (except SCB and 125A rating SC)
1K470000	protection cover for all SC/SCB range
1K522000	protection cover for SA-SAL
1K523000	protection flaps for SU-SUL

### MOUNTING KITS

1LK00100	mounting SC-SO-SF on heatsink or SC-SO on 1LD12020
1LK00200	mounting SG-SVT-SV9 on heatsink or 1LD00500
1LK00300	mounting heatsinks on 1LD00400 or SC-SO on 1LD00000
1LK00700	special kit for high current (okpac range)

### THERMAL SEALS RELAY/HEATSINK

5TH15000	thermal grease for 30 relays SG/SVT ou 60 relays SC/SO
5TH21000	thermal precut film for SC/SO
5TH23000	thermal pads for SC/SO
5TH24000	thermal pads for SA/SU



### MARKING LABELS

1MZ09000 | marking labels to be mounted on protection flaps or covers for SA SU



### DIN RAIL ADAPTORS

1LD00400	DIN rail adaptor for WF21/07/05
1LD00500	DIN rail adaptor for SG/SVT/SV969300
1LD12020	DIN rail adaptor for SC/SV8/SO montage vertical

### MOUNTING + HEATSINK + DIN ADAPTOR OPTION

1LWD1202 | mounting of SC/SV/SO sur 1LD12020 + 1LD12020

### MOUNTING OPTION (screw kit included)

#### ONLY IF QUANTITY > 10

1LW00000	mounting of relays on heatsink
1LWD00000	mounting of heatsink on DIN rail adaptor

# Magnetic Proximity Sensors

## MAGNETIC PROXIMITY SENSORS

We are the experts ! !!!

If you are looking for position, presence, level or speed detection, then we will be able to offer a solution from our range of magnetic sensors.

We can even design a specific product for your applications !

At celduc® relais, we are eager to offer the best products for your application, thanks to our 30-year experience in the key technologies that we use in our products :






- Reed switch, a dry contact in a sealed glass bulb providing insulation at the same time : a simple, reliable and low cost solution.
- Electronic cell, based on either magneto-resistance or Hall effect, necessary for higher performance, particularly in high frequency operation.

## Contents

<b>Reed magnetic sensors</b>	<b>24 to 30</b>
-Level sensors . . . . .	24-25
-Screw positions sensors . . . . .	26-27
-Tubular position sensors . . . . .	28-29
-Sensors for layout on PCB . . . . .	30
<b>Electronical / Hall effect sensors</b>	<b>30</b>
<b>Specific applications</b>	<b>31 to 33</b>
-ATEX sensors . . . . .	31
-Sensors for lifts . . . . .	32
-Safety sensors . . . . .	33
<b>Control magnets</b>	<b>34</b>
<b>Special customer products</b>	<b>35</b>

*REMINDER : Reed switches and magnetic sensors using reed switches can switch AC or DC current. In our technical data-sheets the values given for current and voltage are the maximum values. It means that in DC applications it corresponds to the max. switching current and voltage. In AC applications these values are the peak values, to obtain the nominal value you should divide by 1,414.*

## SCOPE



### Industry

- Counting
- Cylinder positions
- Machine safety
- Advertising panel
- Actuator position
- Liquide level
- Speed control.

### Home

- Burglar alarm
- Camera shutter control window position (blinds)
- Lifts
- Alarms
- Big and small household goods
- Swimming-pools.

### Aircraft, space and army

- Fuel/oil level
- Camera shutter control
- Sensors and actuators for Airbus.

### Specific applications

- ATEX (explosive atmospheres)

## CONTACT TYPE


- NO / A Form → Normally Open
- NC / B Form → Normally Closed
- BISTABLE NO / L Form
- CHANGE-OVER / C Form

Other lengths of cable or wire possible for signifiant quantities.

All our technical data-sheets are available in our website [www.celduc-relais.com](http://www.celduc-relais.com)



## Level sensors



celduc® relais offers a large range of standard or specific level and flow sensors using Reed switches. Our sensors are available in plastic, brass or stainless steel housing, making it possible to use them with various chemical substances and/or operating temperatures.

With some sensors, it is possible to invert function by reversing the float or using the sensor upside down.

Please see the data sheets for more details.

For specific applications (e.g. potentiometric scale, special level sensors) do not hesitate to contact us : products can be developed on request.



Product reference		PTF01060	PTFA1015	PTFA1103 <sup>(1)</sup>	PTFA1104 <sup>(1)</sup>	PTFA1210	PTFA2115 <sup>(1)(2)</sup>
Mounting		Vertically	Vertically High and low level	Vertically High level	Vertically Low level	Vertically High and low level	Vertically High and low level
Contact status (float down)		1NO	1NO	1NC	1NO	1NO+NC	1NO
Connection type		2 wires 600mm	2 wires 1,5m	2 wires 300mm	2 wires 300mm	Cable (3 wires) 300mm	2 wires 1,5m
Material	Housing	Polyamide 6/6 resin with glass fiber content	Polyamide 6/6 resin with glass fiber content	Polypropylene	Polypropylene	Polyamide	Stainless steel
	Float	Polypropylene	Polypropylene			Polyurethane	
Liquid compatibility		Water	Water	<b>1</b>	<b>1</b>	<b>2</b>	<b>3</b>
Float travel		10mm	17mm	9mm	9mm	48,5mm	8mm
Max. switching power		10VA	10VA	50VA	50VA	Top : 10VA Bottom : 3VA	50VA
Max. switching voltage		100Vdc	100Vdc	300Vac/dc	300Vac/dc	Top : 200Vdc Bottom : 100Vdc	300Vac/dc
Max. switching current		0,5A	0,5A	0,5A	0,5A	Top : 0,5A Bottom : 0,25A	0,5A
Density mini		0,8	0,75	0,7	0,7	0,6	0,75
Working temperature		0 / 70°C	0 / 70°C	-10 / 80°C	-10 / 80°C	-10 / 85°C	0 / 100°C
Thread		M8 x 1,25	3/8" threading UNC 1,588mm (16 per inch)	1/8" GAS (28 per inch)	1/8" GAS (28 per inch)	3/8" threading UNC 1,588mm (16 per inch)	M10 x 1

(1) Possible to invert the functions by reversing the float

(2) Available in ATEX version (see page 31).

## Liquids compatibility

- 1** → Compatible with acid : acetic, citric, formic, lactic, nitric diluted, phosphoric, sulphuric diluted ; soda ; alcohols : ethanol, methanol, propanol ; glycol ; mineral oil ; water.  
→ Not compatible with the following solvents : chloroforme, methylene chloride, trichloroethylene, toluene ; hard acids.
- 2** → Compatible with fuels, engine oil, kerosene, lubricating oil, mineral oil, vegetable oil  
→ Not compatible with almost all acids, methylene chloride  
→ Acceptable resistance to water
- 3** → Compatible with almost all the liquids except hard acids.





## Working principle

A float fitted with one or more magnets moves with the liquid and actuates, due to its magnetic field, a hermetically sealed reed contact located in the body of the float.

## Advantages

- One moving part
  - The Reed contact is actuated by a magnetic field only : no contact so no wear
  - The Reed contact is completely isolated from the liquid so perfectly waterproof
- The above advantages allow a safety use, repetitiveness, precision and minimum maintenance.



Product reference	PTFA0100	PTFA0115	PTFA3115	PTFA3315 <sup>(2)</sup>	PTFA3415	PTFA3002
Mounting	Horizontally External mounting	Horizontally External mounting	Horizontally	Horizontally	Horizontally External mounting	Horizontally External mounting
Contact status	1NO	1NO	1NO	1NO	1NO	1NO
Connection type	2 wires 175mm + Molex connector	2 wires 1,5m	2 wires 1,5m	2 wires 1,5m	Cable 1,5m	Cable 20m R in serie
Material	Polyamide 30% glass fiber	Polyamide 30% glass fiber	Polyamide 30% glass fiber	Polypropylene	Polypropylene	Polypropylene
Liquid compatibility	<b>2</b>	<b>2</b>	<b>2</b>	<b>1</b>	<b>1</b>	<b>1</b>
Float travel	50°	50°	50°	50°	50°	50°
Max. switching power	10VA	10VA	50VA	50VA	50VA	50VA
Max. switching voltage	200Vdc	200Vdc	300Vac/dc	300Vac/dc	300Vac/dc	300Vac/dc
Max. switching current	0,5A	0,5A	0,5A	0,5A	0,5A	0,1A
Density mini	0,6	0,6	0,6	0,6	0,6	0,6
Working temperature	0 / 85°C	0 / 85°C	0 / 85°C	-10 / 100°C (wires/85°C)	-10 / 100°C (wires/85°C)	-10 / 100°C (wires/85°C)
Thread	Specific	Specific	Specific	M16 x 2	M16 x 2	M16 x 2

(2) Available in ATEX version (see page 31).

For Stainless steel version please consult us

## Applications

**Heating** (air-conditioning, heaters, humidifiers)

→ To detect the water level in the tank.

**Domestic equipment** (electronic flush, solar systems)

→ To detect the water level.

**Food industry** (coffee machines, vending machines)

→ Check the level of water left in the tank.

**Medical equipment** (sterilising equipment for medical instruments)

→ Check level of water for steam or liquid detergent level.

**Water treatment** (water purifying , desalinating)

→ The sensors enable the reserve water level to be established.

**Swimming pools** (water treatment, water heating)

→ Water level and flow.

**Automobile** (radiator liquids level, windscreen washer, engine oil level, brake oil level)

→ Detection of liquids levels.

**Various industries** (photo lab equipment , scrubber machines, fuel dispensing systems...)



General use screw sensors for industry and household use :





- Rabbit sensors
- Doors opening
- Protection cover presence
- House hold appliances



Product reference	PAA10060	PAA11202	PAB10020	PAC10010	PLA10100	PLA10160	PLA11208	PLA12430	PLA10290 PLA10292
Contact status	NO	NO	NC	Change-over	NO	NO	NO	NO	NO
Connection type	2 wires / FASTON	2 wires	2 wires + HE14 connector	3 wires + HE14 connector	2 wires	2 wires	cable	cable	2 wires
Cable length	680mm	275mm	160mm	70mm	10m	360mm	800mm	3m	220mm
Max. switching power	12VA	12VA	3VA	NC : 3VA NO : 8VA	12VA	12VA	12VA	12VA	12VA
Max. switching voltage	100VDC				100VDC	100VDC	250VDC	250VDC	200VDC
Max. switching current	0,4A		0,25A		0,5A	0,4A	0,4A	0,4A	0,5A
Activation distance	16mm with P6250000	15mm with P6250000	18mm with P6250000	12mm with U4200000	10mm with P6250000	19mm with P6250000	16mm with P6250000	12mm with P6250000	15mm with P4060200
Working temperature	-40 to +85°C	-40 to +100°C			-40 to +85°C	-40 to +100°C	-40 to +100°C	-40 to +100°C	-40 to +85°C
Dimensions (mm)	23x14x6				32x15x6,8				28,57x19x6,34
Fixing screws distance	14mm				17,5mm				15,8mm



Product reference	PLA13701	PLA13715	PLA13725	PLA13750	PLA13780	PLB10060	PLB16701	PLC10040	PLC13701	PLC13780
Contact status	NO	NO	NO	NO	NO	NC		Change-over		
Connection type	cable	cable	cable	cable	cable	cable	cable	cable	3 wires	cable
Cable length	100mm	1,5m	2,5m	5m	8m	3m	100mm	1,5m	100mm	8m
Max. switching power	12VA							NC : 3VA NO : 8VA		
Max. switching voltage	250VDC							100VDC		
Max. switching current	0,4A							0,25A		
Activation distance	10mm with P6250000	10mm with P6250000	10mm with P6250000	10mm with P6250000	10mm with P6250000	4<d<12mm (magnet provided)	4mm (magnet provided)	14mm with P6250000	10mm with P6250000	10mm with P6250000
Working temperature	-40 to +100°C									
Dimensions (mm)	32x15x6,8									
Fixing screws distance	17,5mm									



Product reference	PB158S00	PB195T00	PB285T00	PB367G00	PB390G00	PBA13725	PBA13740	PBA13780
Contact status	NO		NC		NO	NO		
Connection type	2 wires	2 wires	2 wires	2 wires	2 wires	cable	cable	cable
Cable length	80mm	80mm	80mm	80mm	80mm	2,5m	4m	8m
Max. switching power	100VA	50VA	50VA	16VA	16VA	12VA	12VA	12VA
Max. switching voltage	250VAC	250VAC	250VAC	250VDC	250VDC	250VDC	250VDC	250VDC
Max. switching current	3A	1A	1A	0,5A	0,5A	0,4A	0,4A	0,4A
Activation distance	4mm with P4160000	7mm with P4160000	6mm with P4160000	6mm with P4159000	13mm with P4160000	13mm with P4160000	13mm with P4160000	13mm with P4160000
Working temperature	-40 to +100°C	-40 to +100°C			-40 to +100°C	-40 to +100°C	-40 to +100°C	-40 to +100°C
Dimensions (mm)	86x8,5x12,5	86x8,5x12,5	86x8,5x12,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5
Fixing screws distance	75mm			40mm				

## Sensor with metal housing



Product reference	PLMA0220
Contact status	NO
Connection type	1 shielded cable
Cable length	2m
Max. switching power	100VA
Max. switching voltage	300VAC
Max. switching current	1A
Activation distance	25mm (provided magnet)
Working temperature	-40 to +85°C
Dimensions (mm)	88x38x12
Fixing screws distance	69mm

## Screw sensors with safety loop (Alarms)



Product reference	PBA10010	PMG12482
Contact status	NO	NO
Connection type	cable + loop	cable + loop
Cable length	8m	8m
Max. switching power	12VA	12VA
Max. switching voltage	250VDC	250VDC
Max. switching current	0,4A	0,5A
Activation distance	16mm with P4160000	14mm with P6250000
Working temperature	-40 to +100°C	-25 to +85°C
Dimensions (mm)	51x8,5x11,5	33x15x6,8
Fixing screws distance	40mm	17,5mm

## High power switching sensors

These sensors allow controlling loads up to 3A.



Product reference	PSA60010	PSA60015
Contact status	NO	NO
Max. switching power	500VA	500VA
Max. switching voltage	24-440VAC	24-440VAC
Max. switching current	3A	3A
Cable length	2 wires 350mm	Cable 1,5m
Activation distance	12mm with P6250000	13mm with P6250000
Working temperature	-40 to +85°C	-40 to +85°C
Dimensions (mm)	51x16x7	
Fixing screws distance	16mm	

Safety sensors manufactured in compliance with the European Directive 2006/42/CE :

PLC according to ISO13849-1

SIL1 according to IEC62061

Category 1

High MTTFd

For other safety applications see page 33.






# REED MAGNETIC SENSORS



General use tubular sensors for industry and household use :

- Rabbit sensors
- Doors opening
- Protection cover presence
- Household appliances



## Tubular position sensors



Product reference	PTA10440	PTA10540	PTA11235	PTA12401	PTA13715	PTA13730	PTA50010	PTB13702	PTC12301	PTC13730
Contact status	NO							NC	Change-over	
Max. switching power	12VA	12VA	12VA	12VA	12VA	12VA	12VA	3VA	NC : 3VA NO : 8VA	NC : 3VA NO : 8VA
Max. switching voltage	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	250VDC	100VDC
Max. switching current	0,4A	0,4A	0,4A	0,4A	0,4A	0,4A	0,4A	0,25A	0,25A	0,25A
Connection type	2 wires 500mm	3 wires + connector 395mm	Cable 3,5m	2 wires 100mm	2 wires 1,5m	2 wires 3m	2 wires 100mm	2 wires 200mm	3 wires 100mm	Cable 3m
Activation distance with P6250000	7mm	13mm	15mm	14mm	10mm	10mm	18mm	14mm	8mm	7mm
Working temperature	-40 to +85°C									
Dimensions (mm)	Ø6x30						Ø6x25,2	Ø6x30		



Product reference	PTA10490	PMG90010	PMG92291	PTPA0030	PTPA0100	PTPA0230	PTPB0010
Contact status	NO	1NO	1NO	1NO	1NO	1NO	1NC
Max. switching power	10VA	10VA	12VA	12VA	12VA	12VA	12VA
Max. switching voltage	100VDC						
Max. switching current	0,4A	0,4A	0,4A	0,5A	0,5A	0,5A	0,5A
Connection type	2 wires 800mm	Cable 10m	2 wires 200mm	2 wires 3m	Connectors	2 wires 3m	2 wires 80mm + FASTON
Activation distance	16mm with P6250000	12mm with PMG92280	8mm with P6250000	12mm (magnet provided)	12mm (magnet provided)	30mm (magnet provided)	10mm (magnet provided)
Working temperature	-40 to +120°C	-40 to +85°C	-40 to +100°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C
Dimensions (mm)	Ø6x41	Ø12x32	Ø18,5x32,5	Ø11x28	Ø11x28	Ø23x27	Ø23x28



Typical applications :  
-Speed sensors,  
-Presence, position, clearance sensors.

## PTI range – M8 plastic and stainless-steel housing



Product reference	PTI40003	PTI40020	PTI50003	PTI50020	PTI60003	PTI60020	PTI70020
Contact status	1NO / A form	1NO / A form	1NC / B form	1NC / B form	1NO / A form	1NO / A form	1NC / B form
Max. switching power	12VA	12VA	5W	5W	12VA	12VA	5W
Max. switching voltage	200VDC	200VDC	175VDC	175VDC	200VDC	200VDC	175VDC
Max. switching current	0,5A	0,5A	0,25A	0,25A	0,5A	0,5A	0,25A
Connection type	Cable 30cm	Cable 2m	Cable 30cm	Cable 2m	Cable 30cm	Cable 2m	Cable 2m
Activation distance	12mm with magnet PT505000	12mm with magnet PT505000	7mm with magnet PT505000	7mm with magnet PT505000	12mm with magnet PT505100	12mm with magnet PT505100	7mm with magnet PT505100
Working temperature	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C
Dimensions (mm)	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 40 Stainless Steel	M8x1 - Lg 40 Stainless Steel	M8x1 - Lg 40 Stainless Steel

## PTA range – M10 housing



Sensors with M12 housing on request



Product reference	PTA80020	PTA90050	PTA90160	PDLA2030	PDC26730
Contact status	1NO / A form	1NO	1NO	Bistable / L form	Change-over / C form
Max. switching power	12VA	12VA	5W	100VA	60VA
Max. switching voltage	200VDC	100VDC	100VDC	250VAC	250VAC
Max. switching current	0,5A	0,4A	0,4A	1A	1A
Connection type	Cable 2m	Cable 5m	Cable 1,5m	Cable 3m	Cable 3m
Activation distance	25mm with magnet PT810000	10mm with magnet P6250000	12mm with magnet P6250000	3<D<30mm with magnet UP802008	20mm with magnet UR144360
Working temperature	-25 to +70°C	-40 to +125°C	-40 to +125°C	-40 to +75°C	-40 to +75°C
Dimensions (mm)	M10x1 - Lg 44,5 Stainless Steel	M10x1 - Lg 40 Raw brass	M10x1 - Lg 40 Raw brass	M10x1,5 - Lg 85,5 Plastic housing	


# REED MAGNETIC / HALL EFFECT SENSORS



## Sensors for layout on PCB

Reed switch proximity sensors in plastic housing, for PCB mounting with no risk of damage.






				
Product reference	PHA01200	PHA11200	PHC10010	PHC13700
Contact status	NO		Change-over	
Max. switching power	12VA		NC : 3VA / NO : 8VA	
Max. switching voltage	100VDC			
Max. switching current	0,4A		0,4A	
Activation distance with U6250000	18mm	17mm	17mm	11mm
Working temperature	-40 to +100°C			
Dimensions (mm)	23x4,2x3,6			

## Hall effect sensors

celduc® relais offers two ranges of electronical sensors :





- Hall effect sensors
- Gear tooth sensors.



Product reference	PTE11320	PTE11321	PTE21320	PTE21321	PTE31320	PTE31321	PTE41320	PTE41321
Contact status	Hall effect PNP	Hall effect NPN	Gear tooth PNP	Gear tooth NPN	Hall effect PNP	Hall effect NPN	Gear tooth PNP	Gear tooth NPN
Longueur de câble	cable 2m							
Distance max. d'utilisation	19mm	19mm	1,5mm	1,5mm	17mm	17mm	1,5mm	1,5mm
Tension max. commutable	6-48VAC							
Courant max. commutable	0,4A							
Température de fonctionnement	-25°C to +70°C							
Dimensions (mm)	Plastic housing M12x33				Stainless steel housing M12x33			
Aimant associé	PT810000	PT810000			PT810000	PT810000		

## Applications

- Industry
- Lift
- Speed sensors
- Household electrical appliances
- Tractors ...





# SENSORS FOR SPECIFIC APPLICATIONS

## ATEX sensors

**celduc® relais** is notified as manufacturer of ATEX products : INERIS 04ATEXQ406 and offers a wide range of ATEX sensors.

Groupe II : Open-air industry (other than mines) with possible inflammable dust.

CE0080  II 2GD Ex mb II T6  
Ex tD A21 IP67 T85°C

II 1GD Ex ia IIB T6  
Ex iaD 20 T85°C

Types of devices :  
1 for zone 0 (continuous risk)  
2 for zone 1 (intermittent risk)

Gas : G or Dust : D

Protection "m" for zone 1 and "i" for zone 0

Temperature class : T6 (85°C) T4 (135°C) or T3 (200°C).



Product reference	PLA1125Ex	PLB1179Ex	PLC1125Ex	PTA1125Ex	PTB1125Ex	PTC1125Ex
Contact status	1NO	1NC	Change-over	1NO	1NC	Change-over
Temperature group	T6	T6	T6	T6	T6	T6
Max. switching power	10W 12VA	10W 12VA	3VA	10W 12VA	3VA	3VA
Max. switching voltage	60VDC					
Max. switching current	0,4A	0,4A	0,25A	0,4A	0,25A	0,25A
Cable length	cable 5m	cable 10m	cable 5m	cable 5m	cable 5m	cable 5m
Working temperature	-40 to +80°C					
Housing material	Plastic					
Dimensions (mm)	32x15x6,8			Ø6x30		

Product reference	PFA2125Ex	PFA3125Ex	PSS5905Ex	PSS7905Ex	PTA6125Ex	PTA9125Ex
Contact status	1NO	1NO	1NO + 1NC	2NO	1NO	1NO
Temperature group	T6	T6	T4	T4	T4/T6 or T3/T6*	T4/T6 or T3/T6*
Max. switching power	10W 12VA	10W 12VA	3VA	3VA	10W 12VA	10W 12VA
Max. switching voltage	60VDC					
Max. switching current	0,4A	0,4A	0,1A	0,1A	0,4A	0,4A
Cable length	cable 5m	cable 5m	cable 5m	cable 5m	cable 5m	cable 5m
Working temperature	-40 to +80°C		-25 to +85°C		-40 to +200°C	-20 to +200°C
Housing material	Stainless steel	Polypropylene	Plastic		Brass	
Dimensions (mm)	Ø28x60	Ø28x90	51x16		Ø6x41	M10

\*See data-sheets.

# SENSORS FOR SPECIFIC APPLICATIONS



## Sensors for lifts (and other industrial applications)

Sensors for :  
- Detection of the lift position  
- Doors opening control

celduc® relais offers a wide range of magnetic sensors for elevators with reed switches or "Electronic" magnetic sensors using an Hall effect cell or magneto resistance.

The magnetic field created by the permanent magnet, activates the sensitive part (the reed switch or the Hall effect cell or the magneto resistance). It is important to combine the magnet and sensor with consideration to the correct operating conditions (switching distance, presence of ferro-magnetic parts or non ferro-magnetic parts...).

celduc® relais is at your disposal to help you define the right products.

Advantages :  
- insensitive to the ambient working conditions (heat or cold air, humidity, dust...)  
- high reliability  
- large detection distance  
- good reliability to shocks and vibrations  
- IP67



Product reference	PMG12802	PMG12921	PMG12930	PMG13051	PMG13110
Contact status	NO bistable	NO	NO bistable	NC	NO
Max. switching power	60VA	100VA	60VA	30VA	30VA
Max. switching voltage	230VDC	230VDC	230VDC	230VDC	230VDC
Max. switching current	0,3A	3A	1A	0,5A	1A
Cable length	2m	7m	7,3m	6,5m	7m
Activation distance	7<D<25mm with UF252060	17<D<27mm with UP302010	7<D<40mm with UP302010	17<D<27mm with UP302010	9,5mm with UF221105
Working temperature	-25 to +85°C				
Dimensions (mm)	65x15x16	M14x75	80x30x30	M14x75	80x20x15

## PC range – M12 housing



Typical applications :

- Lifts : sensors with 2 or 3 normally open contacts are used to detect the position of the cabin as well as automatic level reset according to the weight.
- Position / clearance sensors.

Product reference	PCA22330	PCA36720	PCC12320	PCLA3020	PCLA3030	PC2A2330	PC3A2330
Contact status	1xNO / A form	1xNO / A form	Change-over / C form	Bistable / L form	Bistable / L form	2xNO / A form	3xNO / A form
Max. switching power	70VA	100VA	3VA	100VA	100VA	70VA	70VA
Max. switching voltage	300VAC	250VAC	100VAC	250VAC	250VAC	300VAC	300VAC
Max. switching current	0,5A	3A	0,25A	3A	3A	0,5A	0,5A
Cable length	Cable 3m	Cable 2m	Cable 2m	Cable 2m	Cable 3m	Cable 3m	Cable 3m
Activation distance	20mm with UR144061	20mm with UR144061	25mm with UR144061	30mm with UP082006	30mm with UP082006	20mm with UR144061	20mm with UR144061
Working temperature	-25 to +75°C	-25 to +75°C	-25 to +75°C	-25 to +75°C	-25 to +75°C	-40 to +75°C	-40 to +75°C
Dimensions (mm)	M12x1 L 80 Plastic housing						

Sensors with M12x1 L50 housing on request

# SENSORS FOR SPECIFIC APPLICATIONS



## Safety sensors

The PXS or PSS type products are designed to control the opening of protective devices, machine casings and access doors.

These products, in their basic design and construction, are conform to the applicable European Directive for machinery safety 2006/42/CEE.

Correctly installed with their associated coded magnets and connected to adapted safety modules, they can reach the following safety level : *PLd and PLe according to EN 13849-1*

*SIL3 according to EN 62061*



Product reference	PXS79150	PXS59150	PXS10350	PXS70150	PSS79050	PSS79150	PSS59050	PSS59150	PSA60010	PSA60020
Contact status	2O	O+C	2O + 1C	2O + 1C	2O	2O	O+C	O+C	10 solid state	10 solid state
Current limiting resistor	10Ω	10Ω	-	10Ω	10Ω	10Ω	10Ω	10Ω	-	-
Max. switching power	3VA	3VA	3VA	3VA	3VA	3VA	3VA	3VA	500VA	500VA
Max. switching voltage	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	24-440VAC	6-440VAC
Max. switching current	100mA	100mA	100mA	100mA	100mA	100mA	100mA	100mA	3A	3A
Cable length	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	2 wires 350mm	2 wires 3m
Activation distance	8mm				5mm				12mm	
Associated coded magnet	P2000100				P3000100				P6250000	
LED option	yes	yes	no	yes	no	yes	no	yes	no	no
Working temperature	-25 to +85°C								-40 to +85°C	

## Associated coded magnets





P2000100



P3000100



P6250000

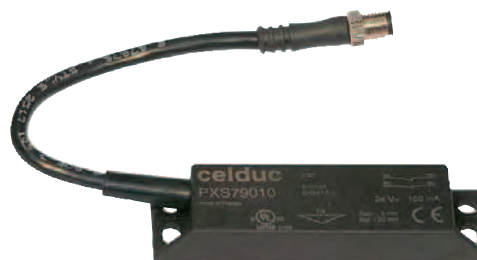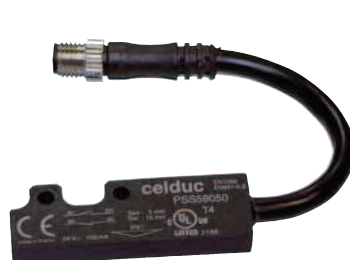

**Terminals version on request**  
**M8 or M12 depends on the model : see data sheet**



## Control magnets

Range of standard permanent magnets used as actuators for our magnetic sensors.

Our range of magnetic sensors with reed switches or "Electronic" magnetic sensors using a Hall effect cell should be actuated with the correct magnet.

celduc® relais offers 3 families of magnets to be chosen according to the application (working temperature, geometry, resistance to corrosion).

Material		Max. operating temperature	Derating according to temperature (recoverable)	Resistance to corrosion	
Alnico		500°C	very low (-0,025% per °C)	Good resistance	generally supplied in bars which should have a length of minimum x4 the diameter
Ferrite		250°C	high (-0,20% per °C)	Very good resistance	generally supplied in parallelepiped block, disc or ring
Rare earth	Samarium Cobalt (SmCo)	250°C	low (-0,04% per °C)	Very good resistance	generally supplied in blocks or granulates
	Neodymium Iron Bore (NdFeBo)	160°C	low (-0.10% per °C)	Bad resistance (must have tin or nickel coating)	generally supplied in blocks or granulates

celduc® relais is at your disposal to help you define the correct magnet/sensor arrangement according to your needs / operating conditions.


### Coated magnets

Product reference	For sensors ...	Bare magnet dimensions (mm)	Dimensions (mm)	Fig n°
PA320000	PA	Ø 3x20	23x15x6	1
P3150000	PA, PH, PL, PT	Ø 3x15	32x15x6,8	2
P4200000	PA, PH, PL, PT	Ø 4x20	32x15x6,8	2
P6250000	PA, PH, PL, PT	Ø 6x25	32x15x6,8	2
P4060200	PLA10290x	Ø 4.7 x 25.4	28,57x19x6,34	3
P4159000	PB or PLA	Ø 3x15	51,8x8,5x11,5	4
P4160000	PB or PLA	Ø 5x25	51,8x8,5x11,5	4
PMG92280	PMG92291	Ø 6x25	Ø 18,5x28	5
PT505000	PTI5 plastic	D5x5	M8x1 Lg 31	6
PT508000	PTI5 plastic	D5x8	M8x1 Lg 31,2	6
PT505100	PTI6 stainless steel	D5x5	M8x1 Lg 40	7



### Bare magnets

Product reference	Material	Dimensions (mm)	Fig n°
U315P003	Alnico5	Ø 3x15	1
U4200000	Alnico5	Ø 4x20	1
U6250000	Alnico5	Ø 6x25	1
U8300000	Alnico5	Ø 8x30	1
U8350000	Alnico5	Ø 8x35	1
UB104000	Alnico5	Ø 10x40	1
UF181538	Ferrite	18x15x3,8	2
UF127738	Ferrite	12x7,7x3,8	2
UF777760	Ferrite	7,7x7,7x6	2
UF207760	Ferrite	20,5x7,7x6	2
UF221105	Ferrite	Ø 22x11x5	3
UF341605	Ferrite	Ø 34x16x5	3
UP051508	Plastoferrite	50x15x8	4
UP301508	Plastoferrite	300x15x8	4
UR102540	NdFeBo	Ø 10x4x2,5	5
UR124540	NdFeBo	Ø 12x4x4,5	5
UR144361	NdFeBo	Ø 14x6x4,3	5
UR304000	NdFeBo	Ø 3x4	6
UR502000	NdFeBo	Ø 5x2	6
UR508000	NdFeBo	Ø 5x8	6
UR604010	NdFeBo	Ø 6x4	6
UR801000	NdFeBo	Ø 8x10	6

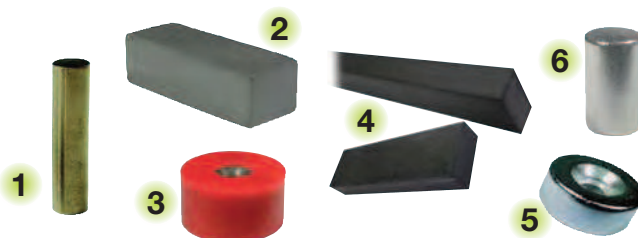

# SPECIAL CUSTOMERS PRODUCTS

## celduc® relais : the expert in specific sensors

There are numerous special customer applications in all sectors of activity. Please consult us to have our expertise.


## Automobile



In the automotive industry there are numerous applications for our magnetic proximity sensors : detection of liquid levels (radiator liquid, windscreen washer, engine oil level, brake oil level, ...) but also closing/locking detection of the fuel tank knob , detection of water in the oil filter, potentiometric scales to be used in lorry tank for level measurement , ...



## Aircraft industry



Serving this industry is a proof of reliability. celduc ® relais has developed special sensors to detect the opening/closing of the doors as for example push-buttons used to detect open/closed doors in Airbus A380 ; sensors to detect tank refueling in Mirage Rafale and Saab Jas 39 fighters ; level sensors for AIRBUS humidifiers, ...




## Medical




In the medical field magnetic proximity sensors can be used in automatic analysis systems to control liquids level, presence of a tank, right-working of the arms, open /closed doors of sterilizers ...



## Swimming pools / Water treatment



Flow sensors are used to supervise the flow rate and the function of the dosing pump and to indicate a failure or loss of capacity of the dosing pump.

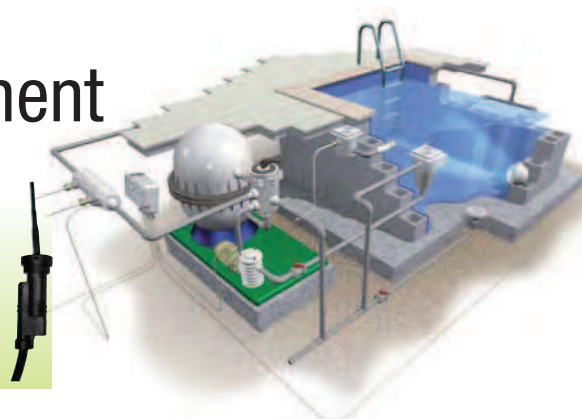

# SWITCHES AND REED RELAYS



Detection : Clearance, position, level, presence  
Switching : Telecom, tester, measurement

## Reed Switches and Mercury Tilt Switches

Detecting a clearance, a position, a level in extrem environments without mechanical link between the moving parts and without maintenance, such is the daily challenge of the Reed contact submitted to a magnetic field in industrial sectors as various as money, space, control, telecom...




Sensitivity to be specified in the order

Product reference	Contact status	Max. switching voltage	Max. switching current	Max. switching power	Standard sensitivity range	Glass length
AB21	1NO	350VDC	1A	100VA	20-35ATf	21mm
AC01		30VDC	0,01A	0,25VA	5-20ATf	6mm
AC03		100VDC	0,5A	12VA	10-35ATf	10mm
AC05		100VDC	0,5A	12VA	10-35ATf	14mm
AJ21		100VDC	0,4A	10VA	10-35ATf	14mm
AV10		7500VDC	0,2A	50VA	80-130ATf	53,4mm
AD22		250VDC	1,3A	80VA	40-105ATf	52mm
AD27/28		250VDC	3A	120W	70-100ATf	50mm
AI02		200VDC	0,5A	10W	15-30ATf	10mm
AI43		200VDC	0,5A	10W	15-30ATf	15mm
AI44	Change-over switch	200VDC	0,75A	30W	15-35ATf	20,5mm
CD29		250VAC	1A	25W	50-90ATf	34,3mm
CD30		500VAC	3A	100VA	60-100ATf	34,3mm
CG21		100VDC	0,25A	NC 3W / NO 8W	15-35ATf	14,5mm
CG21V		100VDC	0,25A	NC 3W / NO 8W	15-35ATf	14,5mm «bent»

## Reed Relays in DIP enclosure

The most popular and the most industrial of the range. It offers all contact combinations. It is designed to switch inputs of telephony levels or PLC, signals from sensors or safety components.




Internal scheme (top view)



Product reference	Contact status	Characteristics of the switch			Characteristics of the coil		Specifications	Dimensions in mm
		Max. switching voltage	Max. switching current	Max. switching power	Nominal voltage	R. coil at 20°C		
D31A3100	1NO	100VDC	0,5A	10VA	5VDC	500 Ω	-	19,1x6,6x6,4
D31A3110		100VDC	0,5A	10VA	5VDC	500 Ω	diode	
D31A5100		100VDC	0,5A	10VA	12VDC	1 kΩ	-	
D31A5110		100VDC	0,5A	10VA	12VDC	1 kΩ	diode	
D31A6110		100VDC	0,5A	10VA	15VDC	2150 Ω	diode	
D31A7100	1NC	100VDC	0,5A	10VA	24VDC	2150 Ω	-	19,1x6,6x6,4
D31A7110		100VDC	0,5A	10VA	24VDC	2150 Ω	diode	
D31B3110		100VDC	0,5A	10VA	5VDC	500 Ω	diode	
D31B5110		100VDC	0,5A	10VA	12VDC	1 kΩ	diode	
D31C2100	Change-over	100VDC	0,25A	3VA	5VDC	200 Ω	-	19,1x6,6x6,4
D31C2110		100VDC	0,25A	3VA	5VDC	200 Ω	diode	
D31C5100		100VDC	0,25A	3VA	12VDC	500 Ω	-	
D31C5110		100VDC	0,25A	3VA	12VDC	500 Ω	diode	
D31C7100		100VDC	0,25A	3VA	24VDC	2150 Ω	-	
D31C7110	2NO	100VDC	0,25A	3VA	24VDC	2150 Ω	diode	19,1x6,6x6,4
D32A3100		100VDC	0,5A	10VA	5VDC	200 Ω	-	
D32A3110		100VDC	0,5A	10VA	5VDC	200 Ω	diode	
D32A5100		100VDC	0,5A	10VA	12VDC	500 Ω	-	
D71A2100		100VDC	0,5A	10VA	5VDC	380 Ω	-	
D71A2110	1NO	100VDC	0,5A	10VA	5VDC	380 Ω	diode	19,1x6,6x5,5
D71A5100		100VDC	0,5A	10VA	12VDC	530 Ω	-	

## Reed Relays in SIP enclosure

Relays for high density component circuits : alarms, testers, industrial control.



Internal scheme (top view)



Product reference	Contact status	Characteristics of the switch			Characteristics of the coil		Specifications	Dimensions in mm
		Max. switching voltage	Max. switching current	Max. switching power	Nominal voltage	R. coil at 20°C		
D41A3100L	1NO	100VDC	0,5A	10VA	5VDC	500 Ω	-	19x(5 or 6)x7,5
D41A3110L		100VDC	0,5A	10VA	5VDC	500 Ω	diode	



## High voltage relay

Dielectric strenght between contacts > 10KVDC and 14VDC between coil and contact.




Product reference	Contact status	Max. switching voltage	Max. switching current	Max. switching power	Nominal voltage	R. coil at 20°C	Specifications	Dimensions in mm
R1380L00	1NO	7500VDC	0,2A	50VA	6VDC	75 Ω	High voltage relays	65x15,2x16,9
R1329L00		7500VDC	0,2A	50VA	12VDC	300 Ω		
R1343L00		7500VDC	0,2A	50VA	24VDC	1200 Ω		
R1402L13	1NC	5000VDC	0,2A	50VA	12VDC	300 Ω		
R1446L13		5000VDC	0,2A	50VA	24VDC	1200 Ω		

## Reed D and R Relay Range

Relays with ferro-magnetic shield in for telecom type applications




Internal scheme (top view)



Product reference	Contact status	Characteristics of the switch			Characteristics of the coil		Specifications	Dimensions in mm
		Max. switching voltage	Max. switching current	Max. switching power	Nominal voltage	R. coil at 20°C		
F51A2100	1NO	250VDC	0,4A	14VA	5VDC	345 Ω	comes in coated version réf. F81Ax100	30x9,5x10
F51A5100		250VDC	0,4A	14VA	12VDC	2145 Ω		
F51A7100		250VDC	0,4A	14VA	24VDC	7845 Ω		
F81A2500	1NO mercury	500VDC	1A	50VA	5VDC	140 Ω	Position vertically	30x9,5x10
F81A5500		500VDC	1A	50VA	12VDC	1000 kΩ		
F81A7500		500VDC	1A	50VA	24VDC	2300 Ω		
F61A2100	1NO	250VDC	0,4A	14VA	5VDC	345 Ω	Coil/contact insulation 4KV	30x9,5x11
F61A5100		250VDC	0,4A	14VA	12VDC	2145 Ω		
F61A7100		250VDC	0,4A	14VA	24VDC	7845 Ω		
F72C2500	2 mercury wetted change-over switch	500VDC	1A	50VA	5VDC	75 Ω	Position vertically	30x16,5x11
F72C5500		500VDC	1A	50VA	12VDC	350 Ω		
F72C7500		500VDC	1A	50VA	24VDC	1350 Ω		



Internal scheme (top view)

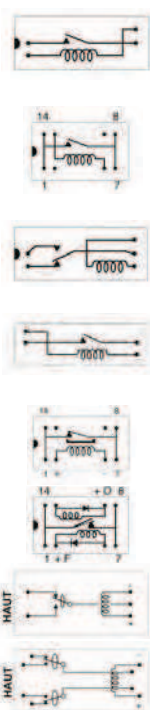

Product reference	Contact status	Characteristics of the switch			Characteristics of the coil		Specifications	Dimensions in mm
		Max. switching voltage	Max. switching current	Max. switching power	Nominal voltage	R. coil at 20°C		
R0292B00	1NO	100VDC	0,4A	12VA	4VDC	250 Ω	-	23x7,5x6,7
R0293B08		100VDC	0,4A	12VA	5VDC	450 Ω		
R0294B08		100VDC	0,4A	12VA	12VDC	1600 Ω		
R0295B08		100VDC	0,4A	12VA	24VDC	2800 Ω		
R0550B08		100VDC	0,4A	12VA	4VDC	500 Ω		
R0551B08	1NO	100VDC	0,4A	12VA	5VDC	500 Ω	DIL layout	20,2x10,1x7,2
R0552B08		100VDC	0,4A	12VA	12VDC	1000 kΩ		
R0553B08		100VDC	0,4A	12VA	24VDC	2150 Ω		
R0250W00		100VDC	0,25A	3VA	4VDC	75 Ω		
R0251W00		100VDC	0,25A	3VA	6VDC	150 Ω		
R0252W00	change-over	100VDC	0,25A	3VA	12VDC	500 Ω	-	23x7,5x6,7
R0253W00		100VDC	0,25A	3VA	24VDC	1800 Ω		
R0115S06		250Veff	3A	100VA	6VDC	250 Ω		
R0116S06	1NO	250Veff	3A	100VA	12VDC	1000 kΩ	step 5,08	65x15,5x16
R0117S06		250Veff	3A	100VA	24VDC	4 kΩ		
R0542B08		100VDC	0,4A	12VA	4VDC	200 Ω		
R0543B08	1NC	100VDC	0,4A	12VA	5VDC	200 Ω	DIL layout	20,2x10,1x7,2
R0544B00		100VDC	0,4A	12VA	12VDC	500 Ω		
R0546B00		100VDC	0,4A	12VA	24VDC	2150 Ω		
R0585B01	1NO bistable 2 coils	100VDC	0,2A	5VA	5VDC	2x500 Ω	DIL layout / diode	20,2x10,1x10
R0582B01		100VDC	0,2A	5VA	12VDC	2x1500 Ω		
R0861P12	mercury wetted change-over switch	500VDC	2A	100VA	5VDC	335 Ω	position vertically	40,8x14,2x10,4
R0760P00		500VDC	2A	100VA	12VDC	680 Ω		
R0761P00		500VDC	2A	100VA	24VDC	2650 Ω		
R0866P00	2 mercury wetted change-over switch	500VDC	2A	100VA	5VDC	125 Ω	position vertically possible C.O.T	40,8x19,8x10,4
R0720P00		500VDC	2A	100VA	12VDC	355 Ω		
R0721P00		500VDC	2A	100VA	24VDC	800 Ω		

# celduc® relais' worldwide presence in more than 60 countries

Algeria  
Argentina  
Australia  
Austria  
Belgium  
Brazil  
Bulgaria  
Chile  
China  
Colombia  
Czech Rep.  
Denmark

Egypt  
Estonia  
Finland  
France  
Germany  
Greece  
Hong Kong  
Hungary  
India  
Indonesia  
Iran  
Ireland

Israël  
Italy  
Japan  
Latvia  
Lithuania  
Malaysia  
Mexico  
Morocco  
Netherlands  
New Zealand  
Norway  
Paraguay

Philippines  
Poland  
Portugal  
Romania  
Russia  
Singapore  
Slovakia  
Slovenia  
South Africa  
South Korea  
Spain  
Sweden

Switzerland  
Syria  
Taiwan  
Thailand  
Turkey  
United Kingdom  
United States  
Ukraine  
Venezuela  
Vietnam

**NORTH  
AMERICA**

**EUROPE**

**Sorbiers**

**ASIA**

**SOUTH  
AMERICA**

**AFRICA**

**PACIFIC**



Sales department France : Tel. +33 (0)4 77 53 90 20  
Sales department for Asia : Tel. +33 (0)4 77 53 90 19  
Sales department for Europe : Tel. +33 (0)4 77 53 90 21  
Sales department for America : Tel. +33 (0)4 77 53 90 19  
Purchasing department : Tel. +33 (0)4 77 53 90 18  
Administrative and financial department : Tel. +33 (0)4 77 53 90 05

5 rue Ampère - BP 30004 - 42290 Sorbiers - France  
Fax : +33 (0)4 77 53 85 51 • [celduc-relais@celduc.com](mailto:celduc-relais@celduc.com)  
[www.celduc-relais.com](http://www.celduc-relais.com)

Your distributor celduc ® / Your agent